



1 to these adverse lane-changing impacts on traffic safety and traffic flow, modelling lane-  
2 changing behaviour remains an area of interest. Compared to discretionary lane-changing,  
3 mandatory lane-changing's negative impacts on traffic flow and road safety are generally more  
4 pronounced because lane-changes (more specifically, forced lane-changes) frequently occur  
5 during merging scenario, which have significant impact on traffic stream as mentioned in  
6 previous research. Due to the greater disruption caused by its mandatory and forceful nature  
7 (Ali et al., 2018), this study focusses on modelling mandatory lane-changing behaviour.

8 Zheng (2014) points out several issues in LCD modelling literature in general and  
9 modelling methodology in particular that need to be addressed. The former includes calibration  
10 and validation issues in LCD models. Except for Kang and Rakha (2017), for example, existing  
11 studies ignore the impact of a waiting period before mandatory lane-changing (i.e., non-  
12 merging events) on the model's performance. Additionally, non-merging events in the data for  
13 calibrating the mandatory LCD model are predominant because merging events are relatively  
14 rare. This unbalanced representation of merging and non-merging events can affect both model  
15 calibration and model validation. Moreover, the performance of a mandatory LCD model is  
16 often evaluated using numerical errors such as Mean Absolute Error (MAE) and Root Mean  
17 Square Error, and these are inadequate for testing the prediction capability of a model for  
18 discrete events such as mandatory lane-changing. Rather, the performance of a mandatory LCD  
19 model should be rigorously evaluated using a frequency-based matrix that is capable of reliably  
20 testing its accuracy in predicting discrete events.

21 Apart from general LCD modelling problems, the adopted LCD modelling  
22 methodology is another important issue that plays a vital role in capturing mandatory LCD  
23 making behaviour of drivers. Driving behaviour varies across different lane-changings  
24 (particularly mandatory), which may be classified as free, cooperative, and forced (Hidas,  
25 2002). In the cooperative and forced lane-changings, at least two decision-makers are involved  
26 in the decision-making process. For example, in a merging scenario, a merging vehicle either  
27 waits or accelerates to attain an acceptable gap, while an immediate follower in the mainline  
28 traffic often responds to the situation either by showing courtesy (i.e., by decelerating or  
29 changing lanes) or by discouraging the mandatory lane-changing (i.e., accelerating or  
30 maintaining their speed as they have the right-of-way). This shows the strong interaction of the  
31 merging and the immediate following vehicles during the mandatory LCD making process, as  
32 each player's decision depends on the (expected) response of the other. If the decision of either  
33 decision-maker is ignored, a collision could result. Unfortunately, most mandatory lane-  
34 changing decision models in the literature consider mandatory lane-changing as a one-way  
35 decision process by focusing on the lane-changer only. In other words, there is a great need to  
36 expand both the behavioural scope and the consistency of the existing approaches to modelling  
37 mandatory lane-changing decisions, as concluded in Zheng (2014).

38 To address this need, this study employs the game theory approach, as this approach  
39 has the ability to simultaneously incorporate the decision of two players. Although the game  
40 theory approach has been used for modelling mandatory lane-changing decisions in the  
41 literature for both traditional environment (Kita, 1999, Liu et al., 2007, Kang and Rakha, 2017)  
42 and connected environment (Talebpour et al., 2015, Weng et al., 2016), several important  
43 issues are yet to be addressed, as discussed in detail in Section 2.3.

44 The objective of this paper, therefore, is threefold: (a) to develop a game theory-based  
45 mandatory lane-changing model for traditional environment and for connected environment by  
46 addressing the aforementioned issues in the previous game theory models; (b) to rigorously  
47 test the developed models using more reliable performance indicators; and (c) to compare the  
48 performance of the developed models with the existing game theory-based mandatory lane-

1 changing models.

2 The main contribution of this study is a game theory-based mandatory lane-changing  
3 model in a connected environment. The performance of model is assessed using the real data  
4 from a connected environment where drivers make decisions with the help of driving aids. The  
5 developed model is rigorously tested using two minimisation algorithms and different waiting  
6 periods. Result shows behavioural soundness and consistency of the model. Furthermore, the  
7 following vehicle's actions are validated for the first time in a game theoretical framework,  
8 which provides further insights into prediction capability and efficacy of the proposed game  
9 theory approach for modelling mandatory lane-changing behaviour.

10 The rest of the paper is organised as follows: Section 2 reviews major modelling  
11 approaches and game theory for modelling mandatory lane-changing behaviour; Section 3  
12 describes the methodology, including model formulation and payoff matrices; Section 4  
13 explains the data sources, processing, and empirical evidence of strategies; Section 5 presents  
14 the model calibration and validation results; Section 6 compares the performances of the  
15 developed models with those of the existing game theory-based mandatory lane-changing  
16 decision models; Section 7 discusses issues and main findings.

## 17 **2. Literature review**

18 For the most part, the literature reviewed comprises two main themes: (a) previous mandatory  
19 lane-changing decision modelling approaches; and (b) mandatory lane-changing decision  
20 modelling using the game theory approach and their main issues. Providing a comprehensive  
21 and exhaustive review of lane-changing decision models is beyond the scope of this paper;  
22 however, interested readers can refer to Zheng (2014).

### 23 **2.1. Lane-changing decision modelling approaches**

24 Major lane-changing decision modelling approaches in the literature include rule-based, utility-  
25 based, and game theory-based approaches. Gipps (1986) was among the first to develop a rule-  
26 based deterministic lane-changing decision model that evaluates the possibility, necessity, and  
27 desirability of a lane-changing. This model also considers factors such as the existence of a  
28 safety gap, the locations of permanent obstructions, the intent of turning movement, the  
29 presence of heavy vehicles, and speed advantage. These factors are evaluated based on a set of  
30 sequential deterministic rules according to their importance. When more than one lane is  
31 available for the lane-changing, this model selects a lane that is deterministically based on a  
32 set of priority rules that depend on factors such as the location of any obstruction, the presence  
33 of a heavy vehicle, and speed gain. Gipps' lane-changing model can be viewed as a decision  
34 tree that generates a binary outcome (i.e., change lane/not change lane), which is based on  
35 various fixed conditions. Due to its deterministic nature, this model fails to incorporate driver  
36 heterogeneity, especially under varying traffic conditions and different interactions between  
37 the subject vehicle and the surrounding traffic stream. To overcome some of the limitations of  
38 Gipps' model, several rule-based models were developed (Yang and Koutsopoulos, 1996,  
39 Hidas, 2002, Kesting et al., 2007).

40 Ahmed et al. (1996) developed a utility-based mandatory lane-changing model that can  
41 incorporate driver heterogeneity and state dependence. The lane-changing process in a utility-  
42 based approach consists of two steps: target lane selection, and gap acceptance (Toledo et al.,  
43 2003). A driver compares the utilities of the available lanes and selects the lane that will best  
44 improve his/her driving condition. The gap acceptance in the target lane is evaluated as a binary  
45 problem in which a driver decides to accept or reject the available gap by comparing it with  
46 the critical (that is, the minimum acceptable) gap. The critical gaps are modelled as random  
47 variables to capture the uncertainty associated with decision-making. Many extensions of, and

1 improvements to utility-based models can be found in the literature (Toledo et al., 2005,  
2 Choudhury et al., 2006, Toledo and Katz, 2009).

3 Game theory-based approaches incorporate the decisions of the lane-changer and the  
4 immediate follower in the target lane in a competing situation, where the outcome of one  
5 decision-maker depends on the actions of the other. The game theory approach captures the  
6 complexity of human behaviour, and determines the optimal outcome from a set of choices by  
7 analysing the cost and benefit to each player as they compete. Exploiting the inherent capability  
8 of game theory, Arbis et al. (2016) study drivers' interactions at a signalised intersection. The  
9 ensuing sub-section further explains the game theory approach in the context of mandatory  
10 lane-changing decision modelling. The ensuing sub-section further explains the game theory  
11 approach in the context of mandatory lane-changing decision modelling.

12 Besides these widely used approaches, researchers have adopted several other  
13 approaches to modelling lane-changing decision behaviour; e.g., artificial intelligence  
14 technique (Moridpour et al., 2009), cellular automata (Maerivoet and De Moor, 2005), markov  
15 process (Toledo and Katz, 2009), and hazard-based models (Hamdar, 2009).

## 16 **2.2. The game theory approach to mandatory lane-changing decision modelling**

17 As one of the first studies that considers merging as a two-player non-zero-sum non-  
18 cooperative game (that is, where both players do not cooperate, and their aggregate gain or loss  
19 is not equal to zero), Kita (1999) developed a merging model using the game theory approach.  
20 Each player has two strategies: the strategies for the subject vehicle (SV) are merging and  
21 waiting, whilst the strategies for the following vehicle (FV) are giving way or not. This model  
22 was based on the safety criterion of time-to-collision, and was calibrated using the maximum  
23 likelihood method. Although the developed model shows promise, it does not consider the  
24 remaining distance in the acceleration lane, a critical factor in the merging process.  
25 Additionally, speed is kept constant during the merging process in this model, and this is  
26 unrealistic (Liu et al., 2007). Moreover, Kita considers time-to-collision as the payoff for both  
27 players. This results in unrealistic Nash equilibria, as both players are similarly affected by  
28 time-to-collision.

29 Liu et al. (2007) present an enhanced game theoretic model for the merging situation  
30 where a merging vehicle's motive is to minimise the time spent in the acceleration lane without  
31 causing a collision, whilst a through vehicle's objective is to minimise interruption to its speed.  
32 Strategies in the model of Liu et al. (2007) are similar to those in the model of Kita (1999).  
33 However, Liu et al. (2007) propose robust payoff matrices for defining the strategies. To solve  
34 the game, a bi-level calibration framework was used, with the upper level as an ordinary least  
35 square problem, and the lower level as a linear complementarity problem for finding the Nash  
36 equilibrium. The units of payoff for both players are different, resulting in a trivial equilibrium  
37 solution. In addition, the acceleration of the merging vehicle in a merging strategy has not been  
38 explicitly considered, and the speed variation of the following vehicle during the yield strategy  
39 is ignored.

40 Wang et al. (2015) presented a game theory-based lane-changing control approach for  
41 connected and automated vehicles in which a lane-changing game can be formulated as non-  
42 cooperative as well as cooperative. This study does not predefine a set of finite strategies, but  
43 rather evaluates different combination of lane-change time and acceleration in a prediction time  
44 window to optimise some performance function (own cost and collective cost). Results indicate  
45 that the proposed control approach reasonably generates future lane-changing decisions whilst  
46 maintaining drivers' safety and comfort.

47 Talebpour et al. (2015) pioneered the game theory approach to modelling lane-changing

1 in a connected environment by applying the Harsanyi transformation (Harsanyi, 1967) to  
2 transform the game from incomplete information to imperfect information. They developed a  
3 generic model for both mandatory and discretionary lane-changing. However, their study does  
4 not explicitly define the formulation of payoff matrices, and does not consider same payoff  
5 units for both players. All of these factors might have resulted in a high prediction error in their  
6 model in replicating observed mandatory lane-changing behaviour. In contrast, the game  
7 theory-based mandatory lane-changing model in a connected environment is calibrated and  
8 validated using NGSIM data, which do not have merging events in a connected environment.

9 Kang and Rakha (2017) model merging behaviour as a two-player game in which the  
10 merging vehicle has three strategies: merging, waiting, and overtaking, and the strategies for  
11 the following vehicle are the same as in previous studies (Kita, 1999, Liu et al., 2007). Payoffs  
12 with different units are formulated on the basis of safety, expected travel time and efficiency,  
13 and acceleration. They adopt the calibration approach proposed in Liu et al. (2007), and report  
14 their model's effective performance.

15 Arbis and Dixit (2019) recently modelled mandatory lane-changing behaviour in a  
16 traditional environment using game theory approach by incorporating conflict risks into  
17 utilities of the players, and reported that longer acceleration lanes and reduced speed limits tend  
18 to reduce the likelihood of a conflict.

### 19 **2.3. Issues in the previous studies using the game theory approach**

20 A thorough literature review of previous game theory-based mandatory lane-changing models  
21 revealed several important issues in the previous studies that are yet to be addressed, as  
22 discussed below.

23 First, following vehicle strategies that they consider are either incomplete or improperly  
24 defined. For example, some studies only consider the yield/give way strategy (Kita, 1999, Liu  
25 et al., 2007, Kang and Rakha, 2017) and ignore other strategies such as doing nothing  
26 (Talebpour et al., 2015). It has been frequently observed in the field that drivers of following  
27 vehicles remain unaffected (or maintain their speed as they have the right-of-way) by the lane-  
28 changing action of merging vehicles, considering such action as safe. Thus, it is necessary to  
29 capture this behaviour of following vehicles to realistically mimic the mandatory lane-changing  
30 decision-making process. Furthermore, some studies consider changing lane as a new strategy  
31 (Talebpour et al., 2015) whereas it is more appropriate to treat changing lane by the immediate  
32 follower as a new game, as the following vehicle would need to play a game with players in  
33 the adjacent lane for changing lanes, which requires a separate formulation and thus, should  
34 not be considered as a strategy in the merging game. In addition, the field data show that  
35 changing lane strategy is rarely selected, which implies that due to insufficient data, reliably  
36 estimating parameters for this strategy would be difficult. This brings another shortcoming of  
37 many existing studies, i.e., the lack of empirical evidence for the selected strategies in the field  
38 data. Mandatory lane-changing strategies in the previous studies are not extracted from, or  
39 verified by field observations. This is important because: (a) different strategies should be  
40 separated based on their availability in the data; and (b) each strategy must have a reasonable  
41 sample size for calibration purpose. Ignoring this aspect in game theory modelling process  
42 would lead to unrealistic and biased parameter estimates of the model.

43 Second, with the exception of Liu et al. (2007) and Kang and Rakha (2017), the  
44 formulation of payoff matrices is not explicitly defined. However, the payoff units for two  
45 players are different in these two studies, and this can result in trivial equilibrium solutions,  
46 which may not be realistic in representing drivers' selection from a set of choices.

47 Third, the previous studies did not fully utilise the advantage of using game theory

1 approach as they only focused on actions of the merging vehicle during the model validation  
 2 process whilst ignoring the actions of the following vehicle. As the game theory approach  
 3 simultaneously evaluates the decisions of two players, it is important to consider the actions of  
 4 both merging and following vehicles when assessing the model's performance.


5 Finally, and more importantly, the developed model for connected environment in  
 6 previous studies is either tested by using NGSIM data (which do not contain any data for  
 7 connected environment) or by numerical simulation, and this can be unrealistic or (even)  
 8 misleading. NGSIM data do not contain decisions under the connected environment whilst  
 9 numerical simulations ignore human factor involved in mandatory lane-changing decision-  
 10 making.

11 In summary, all of the aforementioned approaches (except game theory) consider  
 12 mandatory lane-changing as one-way decision-making process focusing on decision of lane-  
 13 changer whilst ignoring the corresponding action of following vehicle in response to merging  
 14 action of the subject vehicle. In a typical mandatory lane-changing scenario, at least two drivers  
 15 are engaged in decision-making process affecting each other's decision. Ignoring decision of  
 16 any decision maker could result in a crash. In addition, by reviewing the literature, many issues  
 17 in existing game-theory based mandatory lane-changing models are identified. Addressing  
 18 these issues is critical for developing more realistic and behaviourally sound mandatory lane-  
 19 changing models.

### 20 3. Methodology

#### 21 3.1. Game and its components

22 This study first develops a mandatory lane-changing decision model for traditional  
 23 environment (LCD\_TE hereon), and this is then used as the foundation for developing the  
 24 mandatory lane-changing model in a connected environment (LCD\_CE hereon). (Note that the  
 25 mandatory lane-changing model developed in this study is referred as AZHW model and  
 26 LCD\_TE, LCD\_CE, two-strategy, and three-strategy models are mainly the variation of the  
 27 AZHW model.) In the traditional environment drivers perform driving tasks without driving  
 28 aids. The connected environment, in contrast, provides driving aids for assisting drivers to  
 29 perform merging manoeuvres. A typical merging scenario, as shown in Figure 1, includes a  
 30 merging vehicle (subject vehicle [SV] in this study) on the acceleration lane; an immediately  
 31 following/lag vehicle (FV) on the target lane; and (possibly) a lead vehicle (LV) on the target  
 32 lane. In the merging scenario, both SV and FV are assumed to act in a rational way. This  
 33 situation can be modelled as a game with various components such as a number of players,  
 34 player strategies, payoff matrix, and the cooperative or non-cooperative nature of the game.

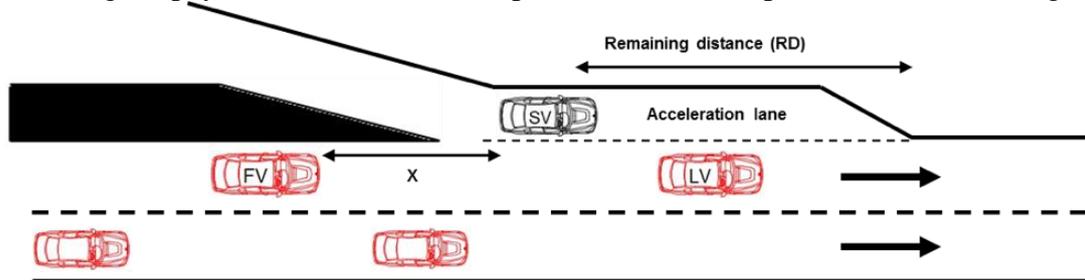

35  
36 **Fig. 1.** A typical merging scenario

37 This study considers a two-player non-zero-sum non-cooperative game under  
 38 incomplete information for the LCD\_TE model, where the two players in a game are SV and  
 39 FV. The interaction between these vehicles is dominant, and the effect of other vehicles (for  
 40 example, the effect of LV) can be implicitly taken into FV's payoff (more discussion on this in

ensuing sub-sections). A non-zero-sum game refers to a game in which all players receive a payoff corresponding to their actions and the sum of their payoffs is not zero. In non-cooperative games under incomplete information, a player has inaccurate information about another player's strategy (i.e., a game in a traditional environment where players make assumptions/predictions of each other's actions).

One of the shortcomings of earlier studies is the incomplete formulation of strategies. This study, in contrast, formulates a comprehensive list of strategies for both players, as shown in Table 1. The strategies for SV are merging and waiting, while FV has four strategies: accelerating, decelerating, doing nothing, and changing lane. Note that this study does not consider overtaking behaviour of SV, which is considered by Kang and Rakha (2017), because overtaking in a high density traffic is rare; in addition, overtaking is prohibited during merging manoeuvres in Queensland, Australia. Table 1 represents a merging game that can be either played in a traditional environment or in a connected environment.


**Table 1.** Merging game for traditional and connected environments in the normal form

FV	SV				Probability for FV
	Traditional environment		Connected environment		
	Merging ( $S_1$ )	Waiting ( $S_2$ )	Merging ( $S_1$ )	Waiting ( $S_2$ )	
Accelerating/Forced merging ( $F_1$ )	$P_{11}, Q_{11}$	$P_{12}, Q_{12}$	$S_{11}, R_{11}$	$S_{12}, R_{12}$	$y_1$
Decelerating/Courtesy yielding ( $F_2$ )	$P_{21}, Q_{21}$	$P_{22}, Q_{22}$	$S_{21}, R_{21}$	$S_{22}, R_{22}$	$y_2$
Doing nothing ( $F_3$ )	$P_{31}, Q_{31}$	$P_{32}, Q_{32}$	$S_{31}, R_{31}$	$S_{32}, R_{32}$	$y_3$
Changing lane ( $F_4$ )	$P_{41}, Q_{41}$	$P_{42}, Q_{42}$	$S_{41}, R_{41}$	$S_{42}, R_{42}$	$y_4$
Probability for SV	$z_1$	$z_2$	$z_1$	$z_2$	

$P$  and  $Q$  respectively denote the payoffs for SV, FV in the traditional environment and the corresponding payoffs in the connected environments are respectively  $S$  and  $R$ ;  $y$  and  $z$  are probabilities of FV's and SV's action, respectively.

The study adopts the Harsanyi transformation (Harsanyi, 1967), which transforms a game of incomplete information (that is, a game in a traditional environment) to a game of imperfect<sup>2</sup> information (that is, a game in a connected environment). Furthermore, the Harsanyi transformation introduces "nature" as a player who chooses the type of each player. Nature's role can be perceived as another player in the game with no payoffs. Nature's choice can be represented by a game tree as shown in Figure 2. Edges coming from a nature's choice node are labelled with the probability of the event that occurs. Without loss of generality, assume that nature selects the driver of SV who is playing a game in the traditional environment. Following the approach presented by Talebpour et al. (2015), the game can be transformed into an extensive form, as shown in Figure 2, which indicates that nature first selects the driver of SV in traditional environment with probability ( $p$ ), and the driver of SV in the connected environment with probability ( $1-p$ ). (Note that nature can select driver of FV as well, however, for simplicity and explanation purpose, the case of SV is reported herein.) It should be noted that these probabilities are from FV's perspective, and both players have similar information about these probabilities. However, SV perceives nature's move and has information about the selection of strategy, whilst FV is unaware of nature's move. After applying this transformation, and combining the transformed game into a normal form, SV will have four strategy, whilst FV will have 16 action sets, as it can be seen in the figure below (see Table 2 for more details).

<sup>2</sup> In an imperfect information game, players are simply unaware of actions chosen by each player; however, each player knows who the other player is in the game, his/her possible strategies, etc (Harsanyi, 1967). Such information is (directly or indirectly) provided by the connected environment.

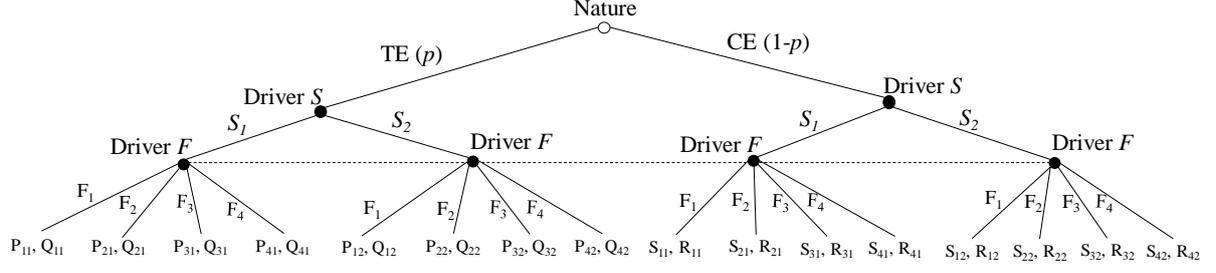

**Fig. 2.** Transformed merging game in the extensive form; TE: Traditional environment; CE: Connected environment

**Table 2.** Transformed merging game in the normal form

Strategy FV	SV			
	$S_1^{TE} S_1^{CE}$	$S_1^{TE} S_2^{CE}$	$S_2^{TE} S_1^{CE}$	$S_2^{TE} S_2^{CE}$
F <sub>1</sub> (Accelerate/ Forced yielding)	$(pP_{11} + (1 - p)S_{11}, pQ_{11} + (1 - p)R_{11})$	$(pP_{11} + (1 - p)S_{12}, pQ_{11} + (1 - p)R_{12})$	$(pP_{12} + (1 - p)S_{11}, pQ_{12} + (1 - p)R_{11})$	$(P_{12} + (1 - p)S_{12}, pQ_{12} + (1 - p)R_{12})$
F <sub>2</sub> (Decelerate)	$(pP_{21} + (1 - p)S_{21}, pQ_{21} + (1 - p)R_{21})$	$(pP_{21} + (1 - p)S_{22}, pQ_{21} + (1 - p)R_{22})$	$(pP_{22} + (1 - p)S_{21}, pQ_{22} + (1 - p)R_{21})$	$(P_{22} + (1 - p)S_{22}, pQ_{22} + (1 - p)R_{22})$
F <sub>3</sub> (Doing nothing)	$(pP_{31} + (1 - p)S_{31}, pQ_{31} + (1 - p)R_{31})$	$(pP_{31} + (1 - p)S_{32}, pQ_{31} + (1 - p)R_{32})$	$(pP_{32} + (1 - p)S_{31}, pQ_{32} + (1 - p)R_{31})$	$(P_{32} + (1 - p)S_{32}, pQ_{32} + (1 - p)R_{32})$
F <sub>4</sub> (Changing lane)	$(pP_{41} + (1 - p)S_{41}, pQ_{41} + (1 - p)R_{41})$	$(pP_{41} + (1 - p)S_{42}, pQ_{41} + (1 - p)R_{42})$	$(pP_{42} + (1 - p)S_{41}, pQ_{42} + (1 - p)R_{41})$	$(P_{42} + (1 - p)S_{42}, pQ_{42} + (1 - p)R_{42})$

$S_i^{TE} S_j^{CE}$  ( $i, j = 1, 2$ ) shows that SV performs mandatory lane-changing in the traditional or connected environments based on the nature's move.

The Harsanyi transformation can be applied to any problem where one phenomenon may have two or more options. Talebpour et al. (2015), for instance, applied Harsanyi transformation to lane-changing types, i.e., mandatory and discretionary lane-changing. The nature was introduced into the game and selected the mandatory lane-changing with probability ( $p$ ) and discretionary lane-changing with probability ( $1-p$ ).

The Harsanyi transformation also states that an incomplete information game (i.e., a game in traditional environment) is Bayes equivalent to a game of imperfect information (i.e., a game in connected environment) if strategies space, and payoffs are the same; however, the attribute vectors are different, and the model needs to be reinterpreted. In the context of this study, connected environment data (obtained from the advanced driving simulator) contain additional attributes (i.e., additional advisory information); and merging decisions are obviously influenced by the connected environment, and will be used to reinterpret the LCD\_CE model.

In the connected environment, drivers receive an uninterrupted supply of information leading to more informed and safer merging decisions. The drivers in the connected environment also have the information about the nature of actions of the following vehicles (traditional environment game versus connected environment game). As such, the connected environment game in a normal form can be formulated as non-zero-sum non-cooperative game, and the structure of the game can be seen in Table 3. (Note that although connected

environment provides information about the surrounding traffic, the game still remains non-cooperative<sup>3</sup> because the connected environment does not force the drivers to act in a cooperative way and decision is still at the discretion of drivers either to accept or ignore the information.)

**Table 3.** A merging game in the connected environment in the normal form

SV	FV			
	Accelerating/Forced yielding (F <sub>1</sub> )	Decelerating/Courtesy yielding (F <sub>2</sub> )	Doing nothing (F <sub>3</sub> )	Changing lane (F <sub>4</sub> )
Merging (S <sub>1</sub> )	S <sub>11</sub> , Q <sub>11</sub> or R <sub>11</sub>	S <sub>21</sub> , Q <sub>21</sub> or R <sub>21</sub>	S <sub>31</sub> , Q <sub>31</sub> or R <sub>31</sub>	S <sub>41</sub> , Q <sub>41</sub> or R <sub>41</sub>
Waiting (S <sub>2</sub> )	S <sub>12</sub> , Q <sub>12</sub> or R <sub>12</sub>	S <sub>22</sub> , Q <sub>22</sub> or R <sub>22</sub>	S <sub>32</sub> , Q <sub>32</sub> or R <sub>32</sub>	S <sub>42</sub> , Q <sub>42</sub> or R <sub>42</sub>

Each player selects one of the strategies to achieve the goal of a game (Kang and Rakha, 2017). However, finding the entire set of optimal/best strategies remains an area of research in the field of economics (Talebpour et al., 2015). To determine the entire set of best responses, the concept of Nash equilibrium is utilised. This is a solution point where no player can unilaterally gain more than his/her expected payoff by changing his individual strategy to another. In a two-player game, consider that player *a* (i.e., SV) has two strategies –  $S = (S_1, S_2)$  – and player *b* (i.e., FV) has four strategies:  $F = (F_1, F_2, F_3, \text{ and } F_4)$ . This suggests that this game has eight possible sets of strategies, and the Nash equilibrium can be defined as:

$$\begin{cases} E_1(S^*, F^*) \geq E_1(S, F^*) \\ E_2(S^*, F^*) \geq E_2(S^*, F) \end{cases} \quad (1)$$

where,  $E_1$  and  $E_2$  represent the expected payoff at equilibrium, and  $S^*$  and  $F^*$  are the equilibrium set of strategies for SV and FV, respectively. The solution approach and solution of the game are presented in Section 5.

### 3.2. Payoff formulations

Earlier studies consider various motives for payoff formulations of players in a game. This leads to different units in the payoffs of different players (Liu et al., 2007, Talebpour et al., 2015, Kang and Rakha, 2017), and results in trivial and unrealistic equilibrium solutions. Therefore, in this study, the payoffs of both players are formulated by using the same motive for acceleration. More specifically, the payoff for SV is defined as the acceleration required for merging or for waiting for the next available gap, while the payoff for FV is defined as the acceleration required to avoid a collision (i.e., forced yielding); showing courtesy (i.e., deceleration and changing lanes); or doing nothing in response to SV's action. Moreover, in a typical merging scenario, the following assumptions are made: (a) prior to the merging event, FV and lead vehicle are in car-following mode; (b) both players (SV and FV) construct their respective payoffs as soon as SV appears on the acceleration lane; and (c) the distance between SV and FV is less than 60 m. Vehicles beyond this range are normally unaffected by each other's decision (Toledo et al., 2003, Liu et al., 2007). The time when both players construct their respective payoff matrices is termed *decision time* (that is, the time when SV appears in the acceleration lane).

<sup>3</sup> A key difference between cooperative and non-cooperative game is that in cooperative games, players can make binding agreements before playing the game, e.g., how to share payoffs. On the other hand, agreements are not binding in non-cooperative games. The individual players are the cornerstone in non-cooperative games whilst cooperative games consider coalition of players (d'Aspremont and Jacquemin, 1988, Dockner and Van Long, 1993).

### 1 3.2.1. Payoffs for FV

2 At decision time, FV needs to decide their action in response to SV's action. For FV, who has  
3 the right-of-way over SV, the available strategies are: accelerating to avoid merging;  
4 decelerating or changing lane to show courtesy; and remaining unaffected by SV's action (i.e.,  
5 doing nothing). Similar to Talebpour et al. (2015) study, this study assumes that maintaining  
6 safety and minimising speed variations are FV's two main motives. For the forced merging  
7 case, the driver of FV prioritises safety and adopts acceleration to avoid a collision with SV.  
8 To show courtesy (by decelerating and changing lanes), FV calculates the required deceleration  
9 or change in speed.

10 Table 4 shows the payoff matrix for FV. In this table, *Acc* stands for acceleration;  
11 subscripts *M* and *W* represent merging and waiting, respectively; subscripts *A*, *D*, *DN*, and *CL*  
12 respectively indicate acceleration, deceleration, doing nothing, and changing lane;  $Acc_{FV}^{LV TL}$  is  
13 the acceleration required for FV, considering the lead vehicle in the target lane as a new leader;  
14  $Acc_{FV}^{FV TL}$  is the acceleration required for FV in the target lane, considering FV (i.e., lane-  
15 changer) as the new lead vehicle in the target lane;  $\Delta V$  is speed change; *G* is the available gap  
16 in the adjacent lane;  $\varepsilon$  &  $\delta$  represent the error terms that capture the unobserved variation, and  
17 are assumed to follow a standard normal distribution,  $N \sim (0,1)$ ; and  $\alpha$  &  $\beta$  are parameters to  
18 be estimated.

19 For the purpose of illustration, consider a case where SV decides to merge straight away  
20 and FV is accelerating; FV has to brake hard to avoid a collision with SV. The projected  
21 required acceleration is shown in Equation (2). The initial states and projected states are  
22 calculated using Newtonian equations, which are similar to those in Liu et al. (2007), and are  
23 explained in Appendix A. (Note that the formulae for calculating each variable [in the payoffs]  
24 are also explained in Appendix A.)

25 **Table 4.** Payoff matrices for FV and SV

Players		SV	
Strategies		Merging ( <i>S</i> <sub>1</sub> )	Waiting ( <i>S</i> <sub>2</sub> )
Payoff for FV	FV Accelerating ( <i>F</i> <sub>1</sub> )	$Q_{11} = \alpha_{11}^0 + \alpha_{11}^1 Acc'_{M-A} + \varepsilon_{11}$	$Q_{12} = \alpha_{12}^0 + \alpha_{12}^1 Acc_{W-A} + \varepsilon_{12}$
	Decelerating ( <i>F</i> <sub>2</sub> )	$Q_{21} = \alpha_{21}^0 + \alpha_{21}^1 Acc_{M-D} + \varepsilon_{21}$	$Q_{22} = \alpha_{22}^0 + \alpha_{22}^1 Acc_{W-D} + \varepsilon_{22}$
	Doing nothing ( <i>F</i> <sub>3</sub> )	$Q_{31} = \alpha_{31}^0 + \alpha_{31}^1 Acc_{M-DN} + \varepsilon_{31}$	$Q_{32} = \alpha_{32}^0 + \alpha_{32}^1 Acc_{W-DN} + \varepsilon_{32}$
	Changing lane ( <i>F</i> <sub>4</sub> )	$Q_{41} \text{ or } Q_{42} = \alpha_{41}^0 + \alpha_{41}^1 Acc_{FV}^{LV TL} + \alpha_{41}^2 Acc_{FV}^{FV TL} + \alpha_{41}^3 \Delta V + \alpha_{41}^4 G + \varepsilon_{41}$	
Payoff for SV	FV Accelerating ( <i>F</i> <sub>1</sub> )	$P_{11} = \beta_{11}^0 + \beta_{11}^1 Acc_{M-A} + \delta_{11}$	$P_{12} = \beta_{12}^0 + \beta_{12}^1 Acc_{W-A} + \delta_{12}$
	Decelerating ( <i>F</i> <sub>2</sub> )	$P_{21} = \beta_{21}^0 + \beta_{21}^1 Acc_{M-D} + \delta_{21}$	$P_{22} = \beta_{22}^0 + \beta_{22}^1 Acc_{W-D} + \delta_{22}$
	Doing nothing ( <i>F</i> <sub>3</sub> )	$P_{31} = \beta_{31}^0 + \beta_{31}^1 Acc_{M-DN} + \delta_{31}$	$P_{32} = \beta_{32}^0 + \beta_{32}^1 Acc_{W-DN} + \delta_{32}$
	Changing lane ( <i>F</i> <sub>4</sub> )	$P_{41} = \beta_{41}^0 + \beta_{41}^1 Acc_{M-LC} + \delta_{41}$	$P_{42} = \beta_{42}^0 + \beta_{42}^1 Acc_{W-LC} + \delta_{42}$

26 Note that  $\alpha_{12}^1 \neq \alpha_{22}^1 \neq \alpha_{32}^1$  as it is expected that FV places different weights to different scenarios. Similarly,  
27  $\beta_{21}^1 \neq \beta_{41}^1$ ,  $\beta_{22}^1 \neq \beta_{42}^1$ .

$$28 \quad Acc_{M-A} = \frac{2(x' - v'_{FV} t_b)}{t_b^2} \quad (2)$$

$$29 \quad Acc'_{M-A} = \text{minimum} \begin{cases} Acc_{M-A}, & \text{if } v_{SV} \sim v_{FV} \\ -4.5 \text{ m/s}^2, & \text{if } v_{SV} \ll v_{FV} \end{cases} \quad (3)$$

$$30 \quad Acc_{M-D} = \text{minimum} (Acc_{M-D}, -3 \text{ m/s}^2) \quad (4)$$

$$1 \quad Acc_{M-DN} = \begin{cases} Acc_{M-A}, & \text{speed of SV} < \text{speed of FV} \\ Acc_{FV} \text{ OR } v_{FV}, & \text{Otherwise} \end{cases} \quad (5)$$

2           Where  $v'_{FV}$  is the projected state (refer to appendix A) of FV;  $t_b$  is the time taken by  
3 FV to react (i.e., 2 s (AUSTROADS, 1993));  $X'$  is a gap between SV and FV when the former  
4 joins the through traffic.

5           In the merging case, FV's motion is governed by the leader in the current state of car-  
6 following. Also, there are two existing conditions (Equation 3) based on the speed of SV: (a)  
7 if the speed of SV is equal or close to the speed of FV, FV will adopt an acceleration ( $Acc_{M-A}$ ),  
8 using the projected states; and (b) if the speed of SV is slower than FV but SV wants to merge  
9 anyway, FV will need to brake hard to avoid a collision.

10           Another option for FV is to show courtesy early by decelerating or changing lanes. For  
11 the deceleration case, the payoff of FV is  $Q_{21}$ , as shown in Table 4. In this case, FV signals that  
12 SV can merge by adopting a comfortable deceleration ( $Acc_{M-D}$ ), obtained from Equation (4).  
13 However, even if a lower deceleration rate is required to avoid a collision, FV would adopt a  
14 higher deceleration rate.

15           Meanwhile, FV can also decide to remain unaffected by SV (i.e., do nothing), given  
16 that FV has the right-of-way. This leads to two situations (refer to Equation 5): (a) if the speed  
17 of SV is greater than the speed of FV, SV will merge without causing any disruption to FV;  
18 and (b) if the speed of SV is lower than the speed of FV, SV will cause FV to decelerate. In  
19 such a scenario, FV's payoff will be  $Q_{31}$ , as shown in Table 4.

20           FV can also choose to change lanes in response to SV's merging attempt. Then FV will  
21 need to calculate speed change ( $\Delta V$ ) and the available gap ( $G$ ) in the target lane. The payoff  
22 for FV will be  $Q_{41}$  (Table 4).

23           For the cases where SV decides to wait for the next available gap, possible scenarios  
24 and their corresponding payoff matrices can be obtained in a similar way. (Refer to Table 4 for  
25 details.)

### 26 3.2.2. Payoffs for SV

27           At the decision time, SV decides either to merge into the through traffic or to wait for the next  
28 available gap. Table 4 shows the payoffs for SV that are calculated according to the initial and  
29 the projected states of both vehicles. (For a detail description of payoffs, refer to Appendix B.)

30           For the purpose of illustration, consider a case where SV decides to merge right away,  
31 and FV accelerates to avoid the merging. In this case, SV has to increase acceleration to reach  
32 the merging point prior to FV to avoid a collision ( $Acc_{M-A}$ , refer to SV's payoff in Table 4).  
33 On the other hand, if FV shows early courtesy by decelerating, and SV still decides to merge,  
34 SV will merge with a comfortable amount of acceleration ( $Acc_{M-D}$ ). As shown in Table 4,  
35 SV's payoff will be  $P_{21}$ .

36           When SV has the right-of-way and FV is neither accelerating nor decelerating but  
37 continuing its current state as dictated by the leader (i.e., doing nothing), SV has a similar  
38 payoff to that achieved by acceleration. SV has to calculate the acceleration ( $Acc_{M-DN}$ ) needed  
39 to avoid a collision with FV, and its payoff will be  $P_{31}$ . Another option for FV is to show  
40 courtesy by changing lanes. In this case, SV has to calculate the acceleration ( $Acc_{M-LC}$ )  
41 required for the merge, and its corresponding payoff will be  $P_{41}$ .

42           For the case where SV decides to wait for the next available gap, SV calculates their  
43 acceleration with respect to the remaining distance in the acceleration lane. The possible  
44 scenarios, and their corresponding payoff matrices, can be obtained in a similar manner. (For


1 more details, refer to Table 4.)

## 2 4. Data sources and processing

### 3 4.1 Data

#### 4 1) NGSIM Data

5 The celebrated NGSIM data are used (FHWA, 2007) to calibrate and validate the LCD\_TE  
6 model. This data contains vehicle speeds and positions for every 0.1 s. Montanino and Punzo  
7 (2015), however, report the inaccuracy of NGSIM data for microscopic models, and propose a  
8 methodology for reconstructing the data. They also applied the proposed methodology to  
9 reconstruct 15 minutes I-80 data-1 (from 4.00 pm to 4.15 pm). Thus, this study first uses the I-  
10 80 reconstructed data (I-80-R hereon) to assess the behavioural soundness and consistency of  
11 the LCD\_TE model. Later, the full I-80 (i.e., 45 mins) data (represented as I-80-F from here  
12 onwards), denoised by Zheng et al. (2013), is used for the LCD\_TE model calibration and  
13 validation. Figure 3 shows the study site that features an on-ramp and an off-ramp, where many  
14 mandatory lane-changings are expected. For the specific purpose of this study, however, only  
15 lane-changings from the on-ramp merge to the freeway are considered. From NGSIM database,  
16 it can be determined when SV is not performing merging. Such instances are termed as  
17 “waiting” or “non-merging events” in this study. (Note that in such cases no merging point is  
18 observed, and model’s predictive capability is assessed against non-merging events.)

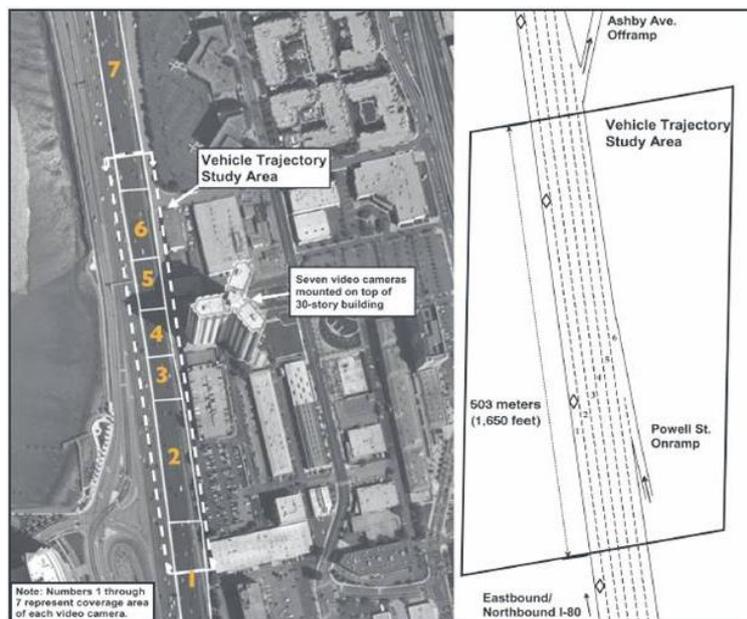

19  
20

**Fig. 3.** I-80 study site (source: FHWA, 2007)

#### 21 2) Data collected from the advanced driving simulator experiment


22 As a powerful tool for collecting data in a controlled environment, driving simulators are  
23 regularly used to study traffic-related road issues. In this study, an advanced high-fidelity  
24 driving simulator experiment was designed and conducted for connected environment  
25 consisting of a mandatory lane-changing scenario. Seventy-eight participants of diverse  
26 backgrounds were recruited to drive in two randomised driving conditions: baseline (i.e.,  
27 without driving aids), and connected environment (i.e., with driving aids). The mean age of the  
28 participants was 30.8 years, and 64.1% were male. Data were collected in the form of vehicle  
29 trajectories and advisory information at every 0.05 s. (More details of the participants and the

1 advanced driving simulator that were presented at the Centre for Accident Research and Road  
2 Safety-Queensland [CARRS-Q] can be seen in Ali et al. (2018.)

3 a) Experiment design

4 A four-lane motorway with two lanes in each direction was designed. It had a posted speed  
5 limit of 100 km/h, and was about 1 km in length. The experiment consisted of a mandatory  
6 lane-changing scenario where the current driving lane was closed. Following the game theory  
7 approach, SV needed to change lanes, whilst FVs were scripted to accelerate, decelerate, or  
8 remain unaffected by SV's merging attempts. (Note that FVs are programmed for data  
9 collection purpose and their behaviour is treated as the same observed in NGSIM database and  
10 no prior information of programmed vehicles is used for LCD modelling.) Since the roadway  
11 segment consisted of two lanes in each direction to avoid complexity in designing vehicular  
12 interactions, the lane-changing manoeuvre of FV, when SV is merging, is very unlikely. Thus,  
13 this strategy is not observed in simulator data. The vehicular interaction and the design of  
14 connectivity are explained below.


15 **Baseline scenario:** Each participant drove the simulator vehicle without driving aids, and faced  
16 a lane closure 750 m from the start of the scenario (Figure 4). A lead vehicle (LV<sub>1</sub>) in front of  
17 SV, and five FVs on the adjacent lane, surround SV. At point B (Figure 4a), LV<sub>1</sub> changed lane  
18 due to the lane closure and, at this instant, following the game theory approach, SV faces five  
19 mandatory lane-changing opportunities. SV can choose any gap between FVs in the target lane  
20 to avoid the lane closure (Figure 4b), and FVs will then follow SV with a predefined speed.

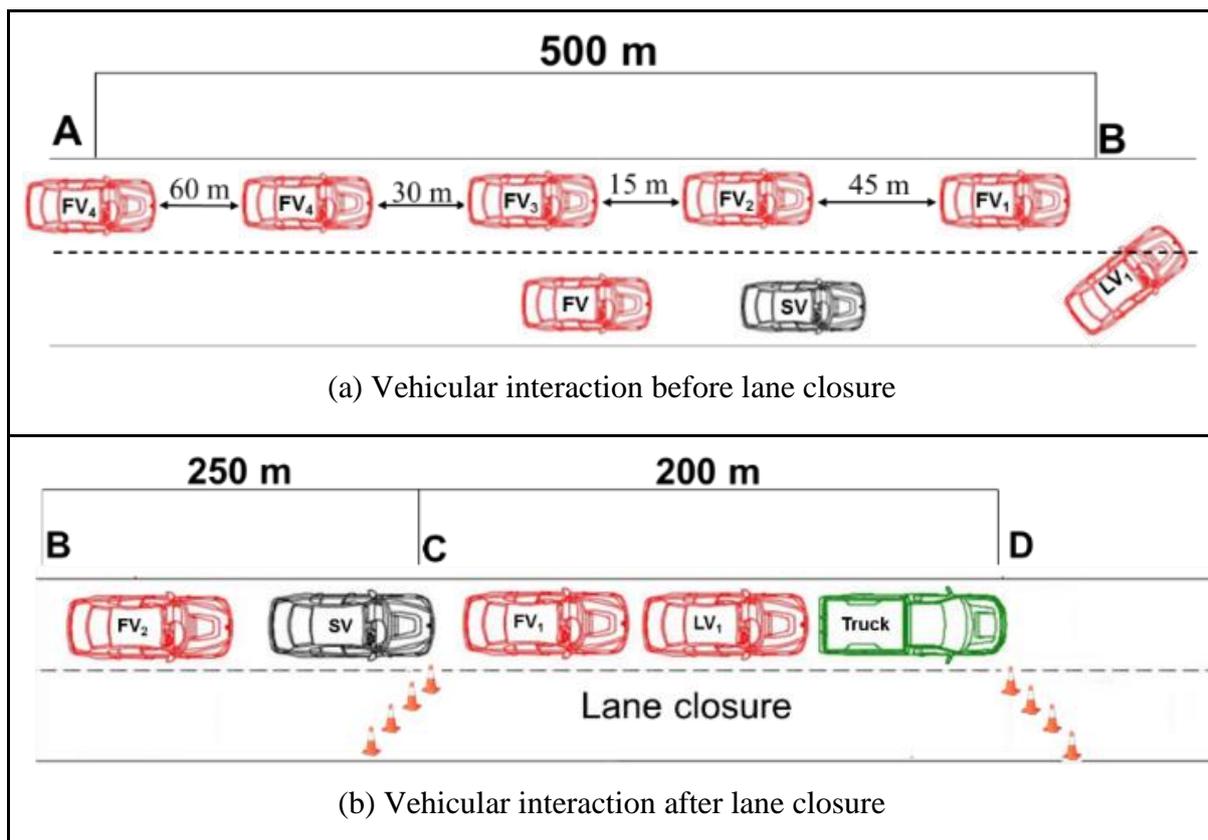

21 **Fig. 4.** Design of mandatory lane-changing events (not to scale)

22 **Connected environment scenario:** The vehicular interactions in the connected environment  
23 scenario were the same as those in the baseline scenario; however, in the former scenario,  
24 participants were assisted with information about upcoming situations. After comprehensively  
25 reviewing the literature on in-vehicle information systems and how driving aids are currently

1 provided by major car manufacturers, participants in the connected environment scenario were  
 2 provided with four types of assisted driving aids: fixed messages, warning messages, advisory  
 3 messages, and lane-changing messages. (The design of some driving aids related to mandatory  
 4 lane-changing is presented in Figure 5.)

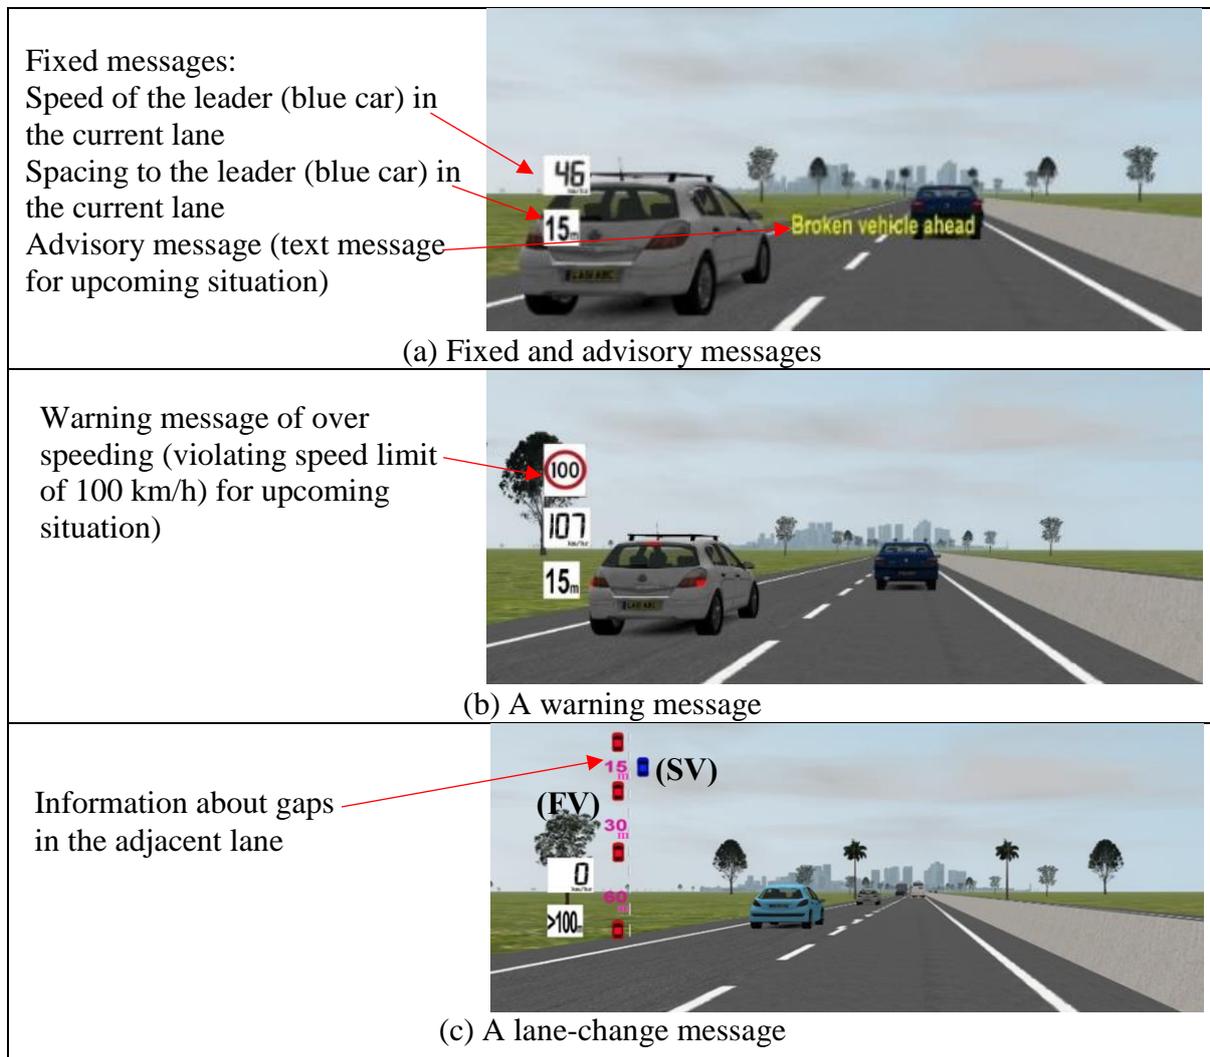

5 **Fig. 5.** Driving aids presented on the windscreen

6 Fixed messages continuously appeared on the left corner of the driving screen, and  
 7 informed the driver of the speed and distance to LV on the current driving lane (Figure 5a; the  
 8 leader is the blue car on the right lane). An advisory message, in text form – such as “Broken  
 9 vehicle ahead” – was presented at the bottom of the screen (with a beep sound) to warn of any  
 10 upcoming situation (Figure 5a). Warning messages flashed up (with three beep sounds) to flag  
 11 a hazardous or critical situation, such as over-speeding (Figure 5b) of SV. To assist in  
 12 mandatory lane-changing decision-making, a lane-changing image appeared on the left corner  
 13 of the driving screen, and was accompanied by a beep sound (Figure 5c) whenever a lane-  
 14 changing opportunity was available in the adjacent lane. The suitability of these messages had  
 15 been tested and confirmed during the pilot study. Furthermore, prior to driving in a research  
 16 drive, the participants were briefed about the design of messages, and performed a practice  
 17 drive to become familiar with the vehicle, the driving environment, and the information design.  
 18 (The participant experiment protocol can be found in Ali et al. (2018).)

19 To minimise the effect of any learning, the study implemented several strategies, such  
 20 as randomising the order of the scenarios, and changing the surrounding environment (e.g.,

1 colour of FVs, vehicle type, and nature of the road blockage) for each drive. In addition, after  
2 each drive, the participants were required to take a short break. (See Ali et al. (2018), for more  
3 information on this strategy.)

#### 4 4.1.1. Balance between merging and non-merging events

5 To develop a mandatory lane-changing decision model, the data need to include both merging  
6 and non-merging events. The decision horizon for non-merging events needs to be carefully  
7 selected to avoid the dominance of non-merging events. Note that the decision horizon refers  
8 to the portion of trajectory prior to merging in which the merge decision process likely starts.  
9 For example, the decision horizon of 2 s indicates one merging and one non-merging events  
10 are selected, and as the decision horizon increases, more and more non-merging events are  
11 included. A balance between merging and non-merging events in the data is necessary for  
12 evaluating the behavioural soundness and consistency of mandatory lane-changing decision  
13 models because this balance impacts the model calibration and validation results. However,  
14 with the exception of Kang and Rakha (2017), existing studies ignore this important aspect.  
15 Thus, this study uses the first 5 s data immediately before the merging to maintain a reasonable  
16 proportion of both events (i.e., merging and non-merging). A sensitivity analysis is performed  
17 by varying the waiting period prior to the merging as 2 s, 5 s, 10 s, and the entire waiting period.  
18 Results show that 5 s data before the merging give reasonable prediction for both merging and  
19 non-merging events. It also reveals that: (i) a driver started to actively seek a merging  
20 opportunity in this 5 s period; and (ii) a driver's decision time window was approximately 2 s.  
21 In modelling driving behaviour, this (latter) measure is widely adopted as the reaction time  
22 (Sagberg and Bjørnskau, 2006, Rakha et al., 2008), and is also consistent with the Australian  
23 Road Standards (AUSTROADS, 1993). See Section 7.1 for more detail.

24 It is worth mentioning here that there may exist strong correlations between non-  
25 merging events and merging events simply because of the time series nature of the data.  
26 However, there are two types of such correlation: genuine and false. The genuine correlation  
27 is the inherent similarity (to some extent) that may exist between how a non-merging decision  
28 and how a merging decision are made, because mandatory lane-changing is a sequential  
29 process where the decision at one time interval is likely to be influenced by the preceding  
30 decision. The false correlation is the correlation falsely created in the data by mislabelling a  
31 traffic situation responsible for merging as one for non-merging. This could be a consequence  
32 of selecting a decision horizon too short. The former should be considered and captured by a  
33 mandatory lane-changing model, while the latter should be avoided because it would only  
34 confound the analysis and lead to ambiguity.

#### 35 4.1.2. Decision of players in the game

36 The decision of SV (i.e., to merge or wait) can be directly obtained from the trajectory data;  
37 however, to obtain data on FV's decision, previous studies adopt subjective methods (including  
38 visual observation for selection of strategies, which could be tricky) that can induce a  
39 significant error, and produce biased results (Liu et al., 2007, Talebpour et al., 2015). To  
40 prevent such error and bias, this study utilises the speed segmentation algorithm (i.e., the  
41 Bottom-Up algorithm) to extract FV's response/decision. The Bottom-Up algorithm uses a  
42 piecewise linear approximation of a time series data (Keogh and Pazzani, 1998), and often  
43 outperforms its counterparts (that are, Sliding window and Top-down) (Keogh et al., 2004).  
44 This algorithm has been successfully used to segment traffic data in the literature (Zheng et al.,  
45 2011).

46 The Bottom-Up algorithm results in segmented speed profiles, and in a matrix  
47 containing segment numbers and corresponding slopes. Ozaki (1993) proposes an empirical  
48 definition for the steady-state regime: if the acceleration or deceleration rate is within 0.05g

1 (“g” is acceleration due to gravity), then it can be termed as “the steady-state regime” (in our  
2 study, it is termed as the “doing nothing” response). Based on this definition (Ozaki, 1993), the  
3 obtained slopes are divided into three categories of FV responses, namely: acceleration  
4 (positive slope  $> 0.05g$ ), deceleration (negative slope  $< -0.05g$ ), and doing nothing (slope  
5 between  $0.05g$  to  $-0.05g$ ). Meanwhile, the changing lane strategy is traced by plotting the  
6 trajectory of FV in two lanes (i.e., the first lane where FV is following SV, and the second lane  
7 where FV takes lane-changing).

8 As the merging scenario is a typical example of a mandatory lane-changing, the drivers’  
9 intention is to merge into mainline traffic as soon as possible. However, there is no ground  
10 truth available about when SV wants to (or starts thinking about) merge into the mainline  
11 traffic. In an ideal situation, we require high-quality trajectory data along with drivers’  
12 intentions informed by the driver him/herself in order to accurately decide the time when the  
13 decision-making process starts. Obviously, obtaining such merging intention is extremely  
14 challenging, if not impossible at all. Thus, we solely rely on the high-resolution trajectories to  
15 extract information about when merging action took place. At each decision interval (which is  
16 2 s, the lane-changing frequency or resolution) prior to the merging point, SV makes a non-  
17 merging decision and the corresponding decision of the following vehicle is obtained using the  
18 segmentation algorithm. Similarly, at the last decision interval, the SV decides to merge  
19 (considered as the merging point), which is obtained from NGSIM database, the corresponding  
20 action of the following vehicle is extracted using the aforementioned approach.

## 21 **4.2. Empirical evidence of the strategies**

22 This study first formulates strategies based on theoretical knowledge, and then verifies them  
23 using field observations and the Bottom-Up segmentation algorithm. The strategies in the field  
24 observations are formulated on the basis of slopes obtained from the Bottom-Up algorithm.  
25 Consider the merging strategy as an example. The last point in SV’s trajectory (i.e., the merging  
26 point) is used to identify the corresponding point in FV’s trajectory. At the corresponding time,  
27 if the slope is positive/negative, FV’s strategy is classified as accelerating/decelerating; if the  
28 slope is between  $0.05g$  and  $-0.05g$ , the FV strategy is doing nothing. FV’s strategies are  
29 similarly determined when SV is waiting.

30 Table 5 shows empirical evidence of the strategies extracted from the I-80-F and  
31 simulator data. Note that the empirical evidence of the I-80-R data is not shown here to avoid  
32 redundancy with the I-80-F data. The data for the model evaluation (either NGSIM or  
33 simulator) properly indicates the game between the players. It can be seen that about 5.3%  
34 (4.1%) of the following vehicles (FVs) in the field (NGSIM data) accelerated (decelerated) in  
35 response to the merging action of the subject vehicle (SV), whilst about 14.3% of FVs remained  
36 unaffected by the merging attempt of SV. Similar proportions of FVs’ actions have been  
37 observed in the simulator data. The corresponding proportions of FVs’ actions (in NGSIM  
38 data) when SV is waiting for another gap are respectively about 4.5%, 8%, and 63.7%,  
39 corresponding to acceleration, deceleration, and doing nothing strategies. This clearly indicates  
40 that there exists a game between SV and the immediate FV. Table 5 also shows that  
41 merging/waiting and changing lane (the shaded rows) are rarely selected in the field for various  
42 reasons such as the high density in the road segment; hence, the changing lane strategy is not  
43 considered for further evaluation. Another reason for leaving this strategy out is that changing  
44 lane altogether becomes a new game for FV. Hence, our final (parsimonious) model contains  
45 three strategies for FV: acceleration, deceleration, and doing nothing. The revised payoffs for  
46 SV and FV are presented in Table 4 (the shaded rows of Table 4 are excluded from the original  
47 payoff matrix).

**Table 5.** Empirical evidence of strategies extracted from the I-80-F and the simulator data.

Strategy	I-80-F (NGSIM)		Baseline (Simulator data)		CE (Simulator data)	
	Count	Percentage	Count	Percentage	Count	Percentage
S-1	126	5.28	7	2.27	0	0
S-2	98	4.11	20	6.49	17	5.47
S-3	340	14.24	51	16.56	61	19.61
S-4	0	0	0	0	0	0
S-5	109	4.57	4	1.3	2	0.64
S-6	190	7.96	18	5.84	20	6.43
S-7	1522	63.76	208	67.53	211	67.85
S-8	2	0.08	0	0	0	0

*S-1 = Accelerating: Merging; S-2 = Decelerating: Merging; S-3 = Doing nothing: Merging; S-4 = Changing lane: Merging; S-5 = Accelerating: Waiting; S-6 = Decelerating: Waiting; S-7 = Doing nothing: Waiting; S-8 = Changing lane: Waiting; CE: Connected environment*

Note that the data processing procedure is the same for both sets of data (i.e., NGSIM and the simulator data).

## 5. Model calibration and validation


### 5.1. Calibration approach

The calibration process determines a set of model parameters that can minimise the difference between the observed and the predicted merging decisions. For this purpose, this study adopts the calibration framework proposed by Liu et al. (2007), as shown in Figure 6. In this framework, which has also recently been used in Kang and Rakha (2017), the parameters are estimated by solving a bi-level programming problem. The upper level is a non-linear programming problem, to minimise the squared difference between the observed and the predicted actions as follows:


$$\min \sum_{i=1}^n [(F_i - \hat{F}_i(y_i))^2 + (M_i - \hat{M}_i(z_i))^2] \quad (6)$$

Where,  $i$  is an index of an observation;  $F_i$  &  $\hat{F}_i$  are the observed and the predicted actions for FV (acceleration, deceleration, and doing nothing);  $M_i$  &  $\hat{M}_i$  are the observed and the predicted actions of SV (i.e., merging and waiting);  $y_i$  &  $z_i$  are the probabilities of FV's and SV's choices, respectively, and the optimisers for the upper level programming.

This study adopts the gradient descent method (Spiess, 1990) to minimise the objective function shown in Equation (6). The gradient descent, also known as “the steepest descent method”, is an iterative search algorithm that searches the optimal solution proportional to the negative of the gradient of the function at the current point. The convergence of gradient descent algorithm is compared with genetic algorithm, which is widely used for calibrating microscopic models, as shown in Figure 7. It can be seen that both algorithms perform reasonably well for the developed game theory-based mandatory lane-changing model. Genetic algorithm, due to its heuristic nature, takes a longer time to converge compared to gradient descent method. Given the model's complexity, and the higher number of parameters to estimate, the gradient descent method is simple and computationally efficient (Mok et al., 2005) and thus, adopted in this study for calibration purpose.

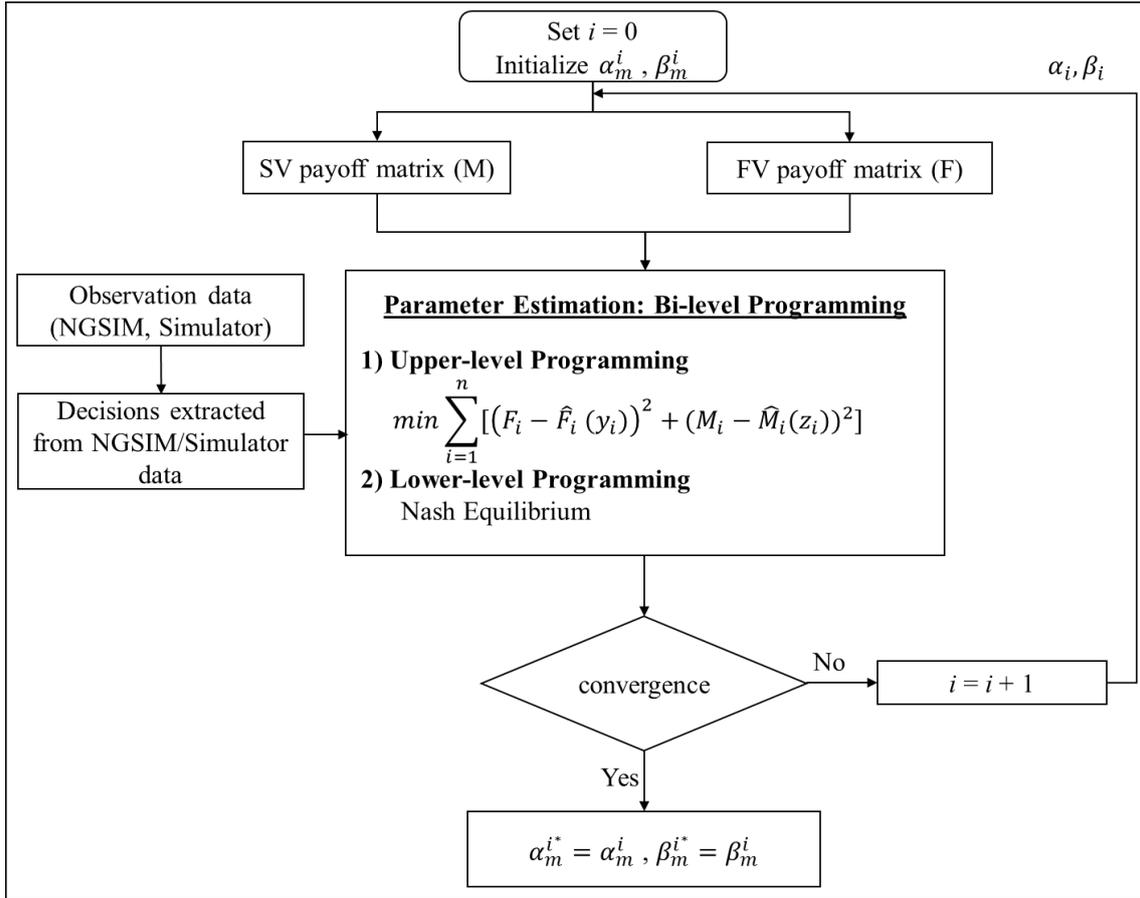

1  
2 **Fig. 6.** Calibration framework for this study

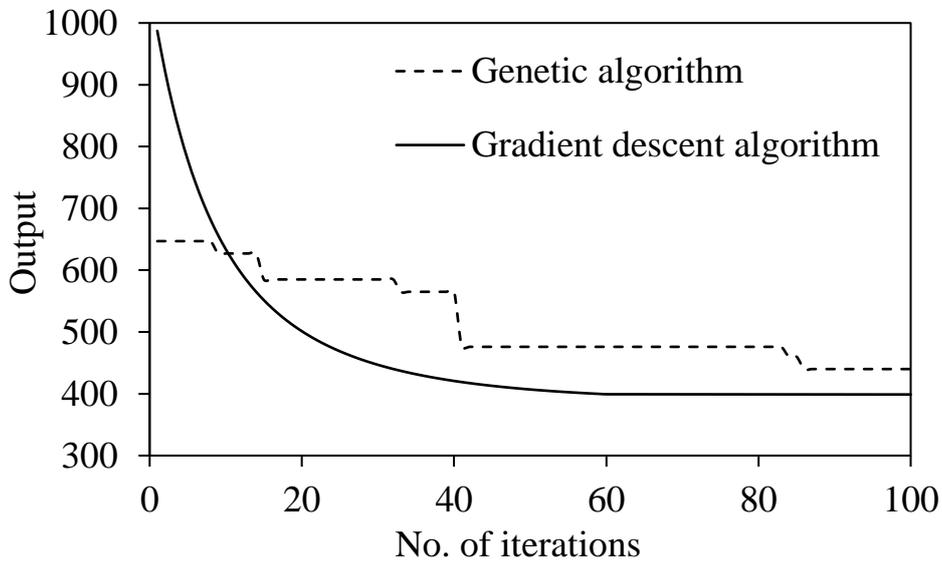

3  
4 **Fig. 7.** Comparison of the convergences of the genetic and gradient decent algorithms

5 The lower level programming seeks the solution for the Nash equilibrium. Obtaining  
6 the entire set of Nash equilibria is generally challenging (Talebpour et al., 2015), and the non-  
7 uniqueness of Nash equilibrium makes it even more difficult (Liu et al., 2007). This study  
8 adopts the support enumeration method (Dickhaut and Kaplan, 1993) to determine the entire  
9 set of Nash equilibria. This approach uses graph theory (i.e., the homeomorphic nature of

graph) to determine Nash equilibria, and solves a system of linear equations corresponding to a set of strategies with a positive selection probability (Talebpour et al., 2015). The adopted calibration framework jointly estimates the parameters of payoffs and the probability of equilibrium selection to accommodate multiple equilibria. This framework is consistent with the probability of equilibrium selection method, originally developed by Kita et al. (2002). Table 1 defines the probabilities of different equilibrium strategies and Equation (6) shows the objective function of the game theory-based model incorporating these probabilities. This method does not require any priori selection criteria from their resultant actions (Kita et al., 2002). In other words, this method does not require the realised equilibrium and the corresponding parameter estimates.

The entire set of Nash equilibria are obtained from the *nashpy* package of python (Nisan et al., 2007), which is integrated with MATLAB to solve the bi-level optimisation problem.

### 5.1.1. Calibration results

#### a) NGSIM data

For calibration of the LCD\_TE model, the NGSIM I-80-R and I-80-F data are used. However, to avoid confusion between I-80-F and I-80-R, the calibration results for the I-80-R data are not presented in this paper. A total of 2385 observations were obtained for the I-80-F data. As a common practice in the literature (Liu et al., 2007, Talebpour et al., 2015), 70% of the data were randomly selected for calibration, while the remaining data were used for validation purposes. Three hundred and ninety-five (out of 564) merging events, and 1305 (out of 1821) non-merging events were used for calibration. Table 6 shows the calibration results for the LCD\_TE model. The mean absolute error (MAE) for calibration is calculated using Equation (7). The MAE for the I-80-F data is 0.15—an error that implies that, on average, the developed model can accurately capture 85% of mandatory lane-changing decisions. A lower MAE was obtained for the I-80-R data.

$$MAE = \frac{1}{n} \sum_{i=1}^n |x_i - \hat{x}_i| \quad (7)$$

where  $x$  represents the actual observation;  $\hat{x}$  is the model predicted decision;  $n$  is the number of observations; and  $i$  is an index of the observations.

**Table 6.** Model calibration results

Strategy	Payoff	Parameter	I-80-F	Baseline	CE	Parameter	I-80-F	Baseline	CE
S-1	FV	$\alpha_{11}^0$	-0.65	-1.60	0	$\alpha_{11}^1$	0.29	0.58	0
S-2		$\alpha_{21}^0$	0.13	-1.78	-0.61	$\alpha_{21}^1$	-0.57	-1.63	-0.6
S-3		$\alpha_{31}^0$	0.47	1.87	1.30	$\alpha_{31}^1$	3.36	3.87	1.71
S-5		$\alpha_{12}^0$	2.91	1.78	1.55	$\alpha_{12}^1$	0.48	2.27	1.76
S-6		$\alpha_{22}^0$	3.34	1.57	1.36	$\alpha_{22}^1$	3.68	1.08	1.07
S-7		$\alpha_{32}^0$	0.19	1.05	1.16	$\alpha_{32}^1$	0.01	1.25	1.11
S-1		SV	$\beta_{11}^0$	0.80	6.39	0	$\beta_{11}^1$	1.27	2.64
S-2	$\beta_{21}^0$		0.44	4.02	6.38	$\beta_{21}^1$	-1.19	-4.65	-0.82
S-3	$\beta_{31}^0$		3.20	5.91	2.18	$\beta_{31}^1$	-1.17	-5.99	-7.51
S-5	$\beta_{12}^0$		0.79	2.25	2.73	$\beta_{12}^1$	0.36	2.16	2.96
S-6	$\beta_{22}^0$		0.96	2.89	0.88	$\beta_{22}^1$	2.46	4.20	2.18
S-7	$\beta_{32}^0$		0.20	1.78	1.79	$\beta_{32}^1$	0.08	6.75	0.64

MAE (I-80-F) = 0.15; MAE (Baseline) = 0.15; MAE (CE) = 0.11

For a description of strategies (S-1, S-2, etc.), refer to Table 4; Baseline and CE data are from the advanced driving simulator; CE: Connected environment

## 1 b) Advanced driving simulator data

2 The data collected from the advanced driving simulator includes both the baseline (i.e., without  
3 driving aids, and similar to NGSIM) and connected environment scenarios (i.e., with driving  
4 aids). (See Section 4 for more details.) Note that the data used in this study are the same as in  
5 Ali et al. (2018). In the baseline scenario, 78 merging events and 230 non-merging events were  
6 obtained. Respectively, there were 55 and 162 merging events and non-merging events used  
7 for calibration purpose. Table 6 summarises the parameter estimates for the baseline scenario  
8 with the MAE of 0.15. In the connected environment scenario, the number of observations is  
9 the same as in the baseline, and a similar proportion of observations was used for calibration.  
10 However, in the connected environment scenario, the participants (i.e., SVs) avoided using the  
11 merging and acceleration strategy (see Table 5 for more details), perhaps considering it as an  
12 unsafe manoeuvre. Similar and consistent findings are reported in Ali et al. (2018) where  
13 drivers also tend to avoid selecting risky gaps in the connected environment. The parameter  
14 estimates are presented in Table 6. The MAE for this model is 0.11.

## 15 5.2. Model validation

16 This section presents the mandatory lane-changing predictive capability of the model based on  
17 the parameter estimates obtained from calibration. To assess the performance of the model, this  
18 study adopts the confusion matrix (Sun et al., 2018). This matrix consists of various  
19 performance indicators that provide valuable insights into a model's predictive capability of  
20 mandatory lane-changing behaviour. (These indicators are highlighted by Zheng [2014] in his  
21 review study.) The adopted performance indicators include: *true positive* (cases where the  
22 model's predicted decision matches the observed decision); *false positive* (cases where the  
23 model predicates a merging event, but the observed decision is a non-merging event); *detection*  
24 *rate* (the percentage of merging events that are correctly predicted by the model); and *false*  
25 *alarm rate* (the percentage of merging events that are falsely predicted by the model). The  
26 model's performance is also assessed for each strategy so as to gain a more complete  
27 understanding of the performance of the proposed modelling approach.

28 As Zheng (2014) notes, as well as using the confusion matrix, the performance of a  
29 mandatory lane-changing decision model can be further evaluated at a finer level by using the  
30 time and the location errors of a merging event that are predicted by the mandatory lane-  
31 changing decision model. The *time error* is the time difference between the observed merging  
32 events and the model's predicted merging events; the *location error* is the spatial difference  
33 between the observed merging events and the model's predicted merging events. A mandatory  
34 lane-changing decision model's time and location errors are two important performance  
35 indicators, as they directly indicate the readiness and suitability of a mandatory lane-changing  
36 decision model for integration into a car-following model in a microsimulation framework.

37 Note that in some cases (although rare) the developed model is unable to predict a  
38 merging event during the entire simulation period. In such cases, a pragmatic yet reasonable  
39 strategy is adopted. At the end of the acceleration lane, all the merging vehicles would have to  
40 force their way into the through traffic; that is, we override the model's decision to "merge" at  
41 the end of the acceleration lane, and then calculate these time and location errors accordingly.  
42 While there is no perfect solution to this problem, this approach seems more realistic than  
43 simply removing these vehicles from the simulation in a brute-force manner, as is done in some  
44 microsimulation packages (Zheng, 2014).

1 5.2.1. Validation results

2 a) NGSIM data

3 The LCD\_TE model is validated using the NGSIM I-80-R and I-80-F. (Again, because of  
 4 confusion, results are presented only for the I-80-F.) Table 7 summarises the validation results  
 5 using the confusion matrix that provides information about overall predictive capability of the  
 6 model; the prediction for mandatory lane-changing (merging) events and non-merging  
 7 (waiting) events; and for each strategy separately. Note that Table 7 also shows the total number  
 8 of events/instances that were validated. The overall detection rate of the LCD\_TE model is  
 9 88%. The model correctly predicts 114 mandatory lane-changing events and 489 non-merging  
 10 events. The results imply that overall the LCD\_TE model performs well in predicting the  
 11 observed merging behaviour, and shows a good predictive capability for each strategy.

12 **Table 7.** Model validation results using the confusion matrix

Cases	I-80-F					Baseline data from simulator					CE data from simulator				
	N	TP	FP	DR (%)	FAR (%)	N	TP	FP	DR (%)	FAR (%)	N	TP	FP	DR (%)	FAR (%)
Overall	685	603	82	88	12	91	81	10	89	11	91	82	9	90	10
Merging	169	114	55	67	33	23	19	4	83	17	23	18	5	78	22
Non-merging	516	489	27	95	5	68	62	6	91	9	68	64	4	94	6
S-1	42	25	17	60	40	5	2	3	40	60	0	0	0	0	0
S-2	28	10	18	36	64	2	2	0	100	0	4	2	2	50	50
S-3	99	79	20	80	20	16	15	1	94	6	19	16	3	84	16
S-5	29	26	3	90	10	1	1	0	100	0	1	1	0	100	0
S-6	31	29	2	94	6	6	6	0	100	0	5	4	1	80	20
S-7	456	434	22	95	5	61	55	6	90	10	62	59	3	95	5

13 *TP: true positive; FP: false positive; DR: detection rate; FAR: false alarm rate; CE: Connected environment*

14 To gain more insights into the model’s performance against different data and quality  
 15 of data, the time and the location errors are calculated. The mean time and location errors for  
 16 the I-80-F (Table 8) are 9.3 s and 155.4 m, respectively. The mean time error of 9.3 s implies  
 17 that, on average, the time difference between the observed and the predicted merging decisions  
 18 varies by 9.3 s. Similarly, the mean location error of 155.4 m indicates that the difference in  
 19 location of the observed and the predicted merging decisions differs, on average, by 155.4 m.

20 **Table 8.** The time and the location errors

Error	I-80-F	Baseline	CE
	Mean (SD)	Mean (SD)	Mean (SD)
Time (s)	9.3 (5.87)	0.42 (0.72)	0.011 (0.016)
Location (m)	155.4 (47.97)	6.23 (4.93)	1.002 (1.37)
Paired <i>t</i> -test for the time error			<i>p</i> -value = 0.01
Paired <i>t</i> -test for the location error			<i>p</i> -value <0.001

21 Using the I-80-R data, consistent results have been found for the confusion matrix and  
 22 the time and the location errors. The time and the location errors are lower in the I-80-R than  
 23 the I-80-F. At a 95% confidence level, this difference is also statistically significant.

24 b) Advanced driving simulator data

25 The baseline scenario data were utilised to validate the LCD\_TE model, and the results are  
 26 presented in Table 7. The model shows an overall detection rate of approximately 89%, with

83% and 89% detection rates respectively for merging events and non-merging events. The model has successfully predicted a higher number of mandatory lane-changings. The predictive capability of the model against each strategy is also higher, showing the capability of the developed model to replicate the observed merging behaviour.

The data from the connected environment scenario were used for the LCD\_CE model validation, and results are summarised in Table 7. Notably, the drivers have avoided the merging and acceleration strategy, which can be unsafe. The predictive capability of this model is relatively higher than the LCD\_TE model using the baseline data. The model predicts the merging events and non-merging events, with the detection rate of 78% and 95%, respectively. Although the detection rate for merging events is lower in the LCD\_CE model than in the LCD\_TE model, it should be noted that there are no cases related to the merging and acceleration strategy in this data. This can be a reason for a higher detection rate in the LCD\_TE model for the baseline. The predictive power of the model for validating each strategy is also found to be reasonable.

The time and the location errors are also calculated for the baseline and connected environment data, and results show that the errors (i.e., time and location) in the LCD\_CE model are lower than in the LCD\_TE model. These errors are significantly different ( $p$ -value  $< 0.001$ ). Notably, the time error in the LCD\_TE model is about 38 times higher than in the LCD\_CE model, while the location error in the LCD\_TE model is about 6 times higher than the LCD\_CE model. These results imply that the LCD\_CE model is able to more accurately capture the merging behaviour in the connected environment.

In addition to validating the merging vehicle's actions, this study also validates FV's actions. The observed FV behaviour (in terms of acceleration) is compared to the model predicted actions of FV (accelerating/decelerating/doing nothing). Table 9 shows confusion matrix for FV. For NGSIM data (I-80-F), approximately 51% actions are successfully predicted by the model; notably 72% of FV actions during merging scenario are predicted by the model. The overall detection rates for the baseline and connected environment scenarios are respectively about 54% and 62%. Prediction accuracy of the model for FV's action can be similarly interpreted as in the case of SV. For instance, 60% of FV's decisions to accelerate during merging scenario in baseline condition (S-1) are successfully predicted by the model. The developed model shows a reasonable prediction accuracy in validating the FV actions during the merging event.

**Table 9.** Confusion matrix for validating FV actions

Cases	I-80-F					Baseline data from simulator					CE data from simulator				
	N	TP	FP	DR (%)	FAR (%)	N	TP	FP	DR (%)	FAR (%)	N	TP	FP	DR (%)	FAR (%)
Overall	685	348	337	51	49	91	48	33	53	37	91	56	39	62	38
Merging	169	121	48	72	28	23	11	12	48	52	23	17	6	74	26
Non-merging	516	227	289	44	56	68	37	31	54	46	68	38	30	56	44
S-1	42	12	30	29	71	5	3	2	60	40	0	0	0	0	0
S-2	28	14	14	50	50	2	1	1	50	50	4	2	2	50	50
S-3	99	95	4	96	4	16	7	9	44	56	19	15	4	79	21
S-5	29	22	7	76	24	1	0	1	0	100	1	0	1	0	100
S-6	31	25	6	81	19	6	2	4	33	67	5	3	2	60	40
S-7	456	180	279	39	61	61	35	26	57	43	62	35	27	56	44

## 6. Comparison of the models

This section compares the developed LCD\_TE and LCD\_CE models (collectively referred to as AZHW models) with the two existing game theory-based mandatory lane-changing models: Liu’s model for traditional environment (Liu et al., 2007), and Talebpour’s model for connected environment (Talebpour et al., 2015). In both these models, the two SV strategies are: merging (or changing lane) and waiting (or not changing lane). Two common strategies for FV are: yield (i.e., decelerate), and do not yield (i.e., accelerate). Changing lane is an additional strategy considered by Talebpour et al. (2015).

To compare these existing models with our AZHW models, we remove the third strategy (i.e., doing nothing) from the AZHW models as it is not considered by the other two models. We also remove the changing lane strategy of FV in Talebpour’s model, as this strategy is not observed in the simulator data.

Hence, the previous models and the AZHW models contain two strategies for SV (merging, and waiting), and two strategies for FV (acceleration, and deceleration). Furthermore, the payoffs for Liu’s model are calculated based on the equations provided in the original work (Liu et al., 2007). However, the original work of Talebpour et al. (2015) does not provide a detailed information about the formulation of payoffs and how accelerations corresponding to different payoffs were calculated. For a fair comparison of the models, we need to calculate payoffs for the Talebpour’s model. A simple and pragmatic strategy is to calculate payoffs using Newtonian equations both for the Talebpour’s and our models. For example, the payoff for the subject vehicle when it is merging, and the following vehicle is accelerating in the Talebpour’s model consists of accelerations: (1) with respect to the leading vehicle in the target lane; (2) with respect to the following vehicle in the target lane; and (3) change in speed. It is unclear in the original work that how variables like acceleration with respect to the leader and the follower within the payoffs are calculated whether they are directly observed from the data or derived using basic variables. Thus, using the Newtonian equations, we determined above accelerations and used for the model comparison purpose. (Details of these calculations are presented in Appendix C.)

To fully assess the performance of the AZHW models, we also compare a three-strategy and a two-strategy AZHW model for FV. (Note that the three-strategy and two-strategy are two variations of the AZHW models.)

### 6.1. Comparison results for the traditional environment

For calibration using the I-80-F data, 153 (out of 223) merging events and 140 (out of 199) non-merging events were utilised. Table 10 shows the calibration results for both models. Note that we recalibrated the AZHW model by removing the doing nothing strategy for FV. The MAEs of the AZHW model and Liu’s model are respectively 0.19 and 0.21.

Table 11 presents validation results for both models, using the confusion matrix. It can be observed that the detection rate of the Liu’s model is 35%, while the corresponding rate for the AZHW model is 71%. This shows that the AZHW model predicts the mandatory lane-changing actions significantly more accurately than Liu’s model.

Table 12 shows the time and the location errors calculated for both models. The results depict that the time and the location errors are lower in the AZHW model than in Liu’s model. More specifically, the time and the location errors in Liu’s model are respectively 3 and 2.5 times higher than in the AZHW model. This indicates the behavioural soundness and consistency of the AZHW model in predicting the observed merging behaviour. The statistical

1 analysis (a paired  $t$ -test) further confirms that these errors are statistically significant.  
2 Consistent results have been found for the I-80-R data.

3 **Table 10.** Calibration results for the Liu, Talebpour, and AZHW models

Model	Data source	Player	Strategies				MAE
			S-1	S-2	S-5	S-6	
AZHW	I-80-F (NGSIM)	FV	$\alpha_{11}^0 = -3.41$ $\alpha_{11}^1 = 1.28$	$\alpha_{21}^0 = 5.19$ $\alpha_{21}^1 = -0.43$	$\alpha_{12}^0 = 1.85$ $\alpha_{12}^1 = 3.70$	$\alpha_{22}^0 = 1.93$ $\alpha_{22}^1 = 0.82$	0.19
		SV	$\beta_{11}^0 = 2.04$ $\beta_{11}^1 = 2.01$	$\beta_{21}^0 = 4.33$ $\beta_{21}^1 = -2.52$	$\beta_{12}^0 = 2.25$ $\beta_{12}^1 = -2.47$	$\beta_{22}^0 = 2.01$ $\beta_{22}^1 = 0.70$	
Liu	I-80-F (NGSIM)	FV	$\beta_1 = -1.83$ $\beta_2 = 0.82$	$\beta_3 = 3.63$			0.21
		SV	$\beta_4 = 3.25$ $\beta_5 = 0.96$	$\beta_6 = -1.31$ $\beta_7 = 4.45$	$\beta_8 = 2.80$ $\beta_9 = 2.81$ $\beta_{10} = 0.73$	$\beta_{11} = -1.36$ $\beta_{12} = -2.17$ $\beta_{13} = 3.07$	
AZHW	CE (Simulator data)	FV	$\alpha_{11}^0 = 0$ $\alpha_{11}^1 = 0$	$\alpha_{21}^0 = 4.32$ $\alpha_{21}^1 = -2.80$	$\alpha_{12}^0 = 0.81$ $\alpha_{12}^1 = 5.29$	$\alpha_{22}^0 = 2.80$ $\alpha_{22}^1 = 0.63$	0.14
		SV	$\beta_{11}^0 = 0$ $\beta_{11}^1 = 0$	$\beta_{21}^0 = 3.25$ $\beta_{21}^1 = -2.44$	$\beta_{12}^0 = 2.60$ $\beta_{12}^1 = -3.77$	$\beta_{22}^0 = 1.20$ $\beta_{22}^1 = 0.38$	
Talebpour	CE (Simulator data)	FV	$\alpha_{11}^0 = 0$ $\alpha_{11}^1 = 0$	$\alpha_{21}^0 = 0.62$ $\alpha_{21}^1 = -0.53$	$\alpha_{12}^0 = 0.81$ $\alpha_{12}^1 = 1.66$	$\alpha_{22}^0 = 0.36$ $\alpha_{22}^1 = 0.75$	0.19
		SV	$\beta_{11}^0 = 0$ $\beta_{11}^1 = 0$ $\beta_{11}^2 = 0$ $\beta_{11}^3 = 0$	$\beta_{12}^0 = 1.09$ $\beta_{12}^1 = -0.34$ $\beta_{12}^2 = 0.53$ $\beta_{12}^3 = 0.44$	$\beta_{21}^0 = 0.83$ $\beta_{21}^1 = -3.77$	$\beta_{22}^0 = 0.04$ $\beta_{22}^1 = 0.38$	

4

5

**Table 11.** Model comparison using the confusion matrix

Data	I-80-F									CE										
	N		TP		FP		DR		FAR (%)		N		TP		FP		DR (%)		FAR (%)	
	Model	A	L	A	L	A	L	A	L	A	L	A	T	A	T	A	T	A	T	
Overall	129	92	45	37	84	71	35	29	65	12	10	7	2	5	83	58	17	42		
Merging	70	55	17	15	53	79	24	21	76	5	3	2	2	3	60	40	40	60		
Non-merging	59	37	28	22	31	63	47	37	53	7	4	5	2	2	100	71	0	29		
S-1	33	23	9	10	24	70	27	30	73	0	0	0	0	0	0	0	0	0		
S-2	37	32	8	5	29	86	22	14	78	5	3	2	2	3	60	67	40	33		
S-5	30	17	15	13	15	57	50	43	50	1	1	0	0	1	100	0	0	100		
S-6	29	20	13	9	16	69	45	31	55	6	3	5	0	1	100	83	0	17		

6 *PI: Performance indicator; A: the AZHW model; L: the Liu's model; T: the Talebpour's model*

7

**Table 12.** Comparison of the time and the location errors

Data source	I-80-F		CE from the advanced driving simulator	
	AZHW model Mean (SD)	Liu's model Mean (SD)	AZHW model Mean (SD)	Talebpour's model Mean (SD)
Time (s)	2.3 (4.17)	6.69 (7.55)	0.004 (0.008)	0.012 (0.015)
Location (m)	14.31 (21.86)	34.54 (22.44)	0.569 (1.073)	1.51 (1.38)
Paired $t$ -test for the time error	$p$ -value <0.001		$p$ -value <0.001	
Paired $t$ -test for the location error	$p$ -value <0.001		$p$ -value <0.001	

## 6.2. Comparison results for the connected environment

Table 10 also presents calibration results for the selected strategies using the connected environment scenario data. Note that 12 (out of 17) merging events, and 15 (out of 22) non-merging events were used for calibration purpose. The MAEs for the AZHW and Talebpour's models are respectively 0.14 and 0.19. Table 11 shows validation results for both models. The overall detection rates for the AZHW and Talebpour models are respectively 83% and 58%. The AZHW model also shows a high accuracy in validating each strategy.

Table 12 also presents the time and the location errors of both models, and it is observed that both the errors (i.e., time and location) are lower in the AZHW model than in Talebpour's model. The comparison analysis indicates that the time and the location errors in Talebpour's model are respectively approximately 3 and 2.65 times higher than in the AZHW model, indicating that the AZHW model predicts the observed merging behaviour more accurately than the Talebpour's model. The differences in the time and the location errors are also found to be statistically significant (Table 12).

## 6.3. The three-strategy AZHW model and the two-strategy AZHW model: A comparison

Since earlier LCD\_TE models formulate the mandatory lane-changing game with two strategies for FV, this study extends the strategy space to capture the actual driving behaviour; therefore, using NGSIM and the simulator data, we compare the AZHW model with three strategies for FV with a two-strategy AZHW model. Using the I-80-F data, the detection rates for the model's overall performance (88% versus 82%), merging events (77% versus 61%), and non-merging events (99% versus 95%) were higher for the three-strategy AZHW model than for the two-strategy AZHW model. This suggests that the three-strategy AZHW model more accurately captures the driving behaviour. In addition, the time and the location errors are significantly less in the three-strategy AZHW model; a paired *t*-test further confirms that this difference is statistically significant.

More importantly, the third strategy – that is, doing nothing – cannot be ignored because it has a high percentage occurrence in the real-world (see Table 5 for empirical evidence). Moreover, the advanced driving simulator data were also used to justify the need for the three-strategy AZHW model. In terms of the detection rate, and the time and the location errors, results confirm the better performance of the three-strategy AZHW model when compared with its two-strategy counterpart. With the exception of the baseline, the time and the location errors are also found to be statistically different. Consistent results have also been found when using the I-80-R data.

## 7. Discussion and Conclusion


### 7.1 Discussion

The AZHW models address the shortcomings of existing game theory-based mandatory lane-changing models such as improperly defined strategies, no empirical evidence of strategies, evaluating model performance using conventional measures and etc (Liu et al., 2007, Talebpour et al., 2015, Kang and Rakha, 2017). In a game theory-based mandatory lane-changing model, the consideration of strategies for each player and their presence in the field/real data play a significant role in replicating the observed mandatory lane-changing behaviour. Although frequently observed in the field, the 'doing nothing' strategy was ignored by prior research in mandatory lane-changing models, which can lead to unrealistic estimates of observed mandatory lane-changing behaviour. To overcome this issue, this study considers a comprehensive set of strategies for FV based on a thorough literature review and theoretical knowledge. Such theoretical strategies are carefully defined using Newtonian equations of motion to mathematically translate the real driving behaviour. The considered strategies are

1 then verified using the real data to determine whether all of the strategies exist in the real data  
2 and how frequent drivers adopt such strategies. Using the Bottom-Up segmentation algorithm,  
3 empirical evidence for different mandatory lane-changing decision strategies was extracted,  
4 and the results suggested that changing lane strategy is rarely selected by drivers in response  
5 to drivers' merging actions. In addition, changing lane action of FV would become a new game  
6 for FV, which requires separate formulation of discretionary lane-changing by FV in the  
7 adjacent lanes. Thus, changing lane strategy was not further considered.

8 Calibration of lane-changing (more specifically, mandatory) models is an important  
9 step to assess the performance of the developed models. The selection of lane-changing  
10 frequency is critical in model calibration. This is a common challenge existing in the lane-  
11 changing modelling literature, that is, "the lane-changing frequency depends on the number of  
12 times that the decision-making process has been evaluated; this indicates that the duration of  
13 the time step becomes a parameter of the model" (Zheng, 2014). Due to rare merging events,  
14 without a careful and a proper consideration the number of non-merging events can easily  
15 become dominant in the data. We implemented a strategy to minimise its consequence in  
16 mandatory lane-changing modelling. More specifically, since there is no guideline in the  
17 literature on how to tackle this problem and select the appropriate proportion of merging and  
18 non-merging events, a sensitivity analysis has been carried out by varying the decision horizon  
19 (i.e., increasing number of non-merging events). Figure 8 shows the results of sensitivity  
20 analysis of the LCD\_TE model using NGSIM data (i.e., I-80-F). It can be seen that when the  
21 decision horizon is 2 s prior to merging, the model shows approximately equal detection rates  
22 for each of the cases (i.e., overall model performance, merging, and non-merging). Three  
23 noteworthy observations in our sensitivity analysis, when the decision horizon increases from  
24 2 s to the entire trajectory, are: (a) the overall detection rate tends to increase; (b) the detection  
25 rate of merging events drastically decreases; and (c) the detection rate of non-merging events  
26 increases. However, the detection rate, when the entire trajectory is considered, does not truly  
27 reflect the model's performance because the sample is dominated by non-merging events, and  
28 consequently the model tends to over-emphasise non-merging events in order to increase its  
29 detection rate. As such, considering the entire trajectory results in biased estimates of the  
30 model.

31 Furthermore, it can be seen that when the decision horizon is about 5 s prior to merging,  
32 the detection rate for each case (that is, overall model performance, merging, and non-merging)  
33 are well above than 50%, which is reasonable. Meanwhile, the decision horizon of 2 s shows  
34 better results compared to other decision horizons. But we prefer the decision horizon of 5 s  
35 over 2 s mainly for three reasons: (1) the decision horizon of 2 s gives a 1:1 merging vs non-  
36 merging ratio, which is the fewest decision events we can get, and thus contains less  
37 information useful for distinguishing these two types of events; (2) as the 5 s situation before  
38 the merging may have a strong correlation with the situation that suits for merging decision,  
39 traffic conditions within 2 s prior to the merging event may strongly resemble those that lead  
40 to merging events, thus, it would be difficult for a model to meaningfully distinguish these two  
41 types of events using the data in the 2 s decision horizon; and (3) the decision horizon of 5 s is  
42 also consistent with many studies in the literature (Thiemann et al., 2008, Doshi and Trivedi,  
43 2008, Doshi and Trivedi, 2009, Beck et al., 2017).

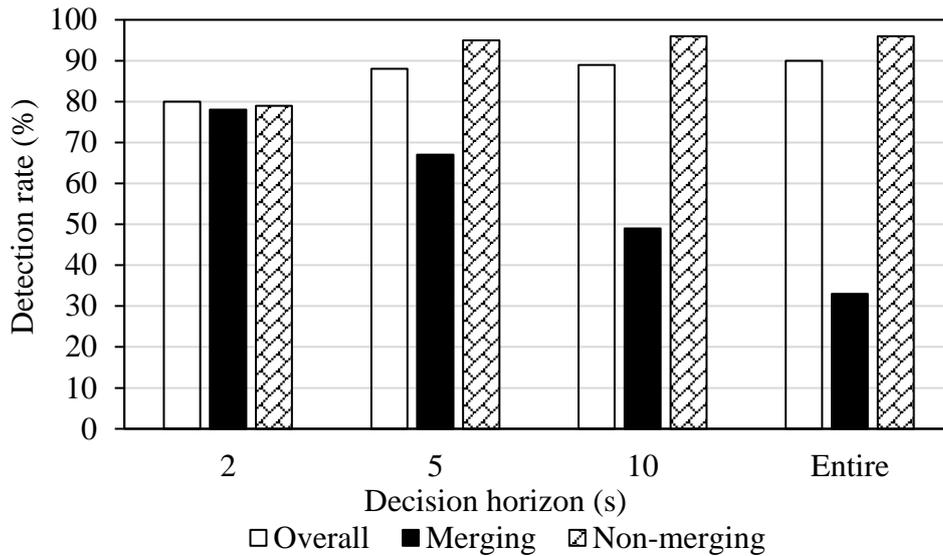

**Fig. 8.** Results of sensitivity analysis of LCD\_TE model using NGSIM

Empirical evidence shows that observations for different strategies obtained from either NGSIM or simulator data are unbalanced (refer to Table 5). Such unbalanced representation across strategies may have some implications on the model performance in the calibration process, which is a topic for future research.

To assess the mandatory lane-changing models' performance that generates discrete outcome, prior research has used conventional measures such as mean absolute error or root mean square error, which provide little or no information into predictive power and behavioural soundness of models. As such, this study used the confusion matrix to assess the model's performance consisting of the true and false positive, and the detection and false alarm rates. The confusion matrix is an excellent tool for rigorously and objectively assessing a decision model's performance. To further evaluate models' performance at a micro level, the time and locations errors are calculated to measure temporal and spatial difference between the observed and predicted outcomes. The time and the location errors were also used to assess the model's ability to estimate the merging occurrence time and location. This ability can be helpful in improving the realism of microsimulation tools where a mandatory lane-changing decision model is one of the building blocks. Using these performance indicators, the predictive capability of the model in general, and for each strategy in particular, has been thoroughly examined.

As game theory incorporates decisions of two players, all of the existing studies (to the best of authors' knowledge) only validated the actions of merging vehicles while ignoring the following vehicle actions. This is understandable because the focus of a mandatory lane-changing model is to replicate mandatory lane-changing decision-making behaviour, however, it does not fully utilise the game theory approach's efficacy in describing actions of both players in a merging scenario. Thus, this study also validates FV actions by using confusion matrix and results show a satisfactory performance of the developed model. A lower prediction capability of model for FV actions can be attributed to discrete nature of the game theory-based model whereas FV actions are continuous (such as acceleration, deceleration, etc.).

One of the issues with game theory-based models is the large number of parameters, which can make model calibration challenging. As such, a simple minimisation algorithm, i.e., gradient descent method, was used for calibrating all the parameters in this study. However, the performance of gradient descent method has been questioned in the literature. Thus, genetic

1 algorithm was also used for comparison purpose. Both the algorithms showed similar  
2 performance, however, gradient descent method was selected and used in this study due to its  
3 simplicity and computational efficiency.

4 Another issue with game theory-based models is its scalability. It is already very  
5 complicated to formulate the game for two players. In reality, there can be interaction with  
6 more than two players, especially in the connected environment. Such work is left for future  
7 research.

8 Since connected vehicular data are not readily available, researchers mainly rely either  
9 on NGSIM or numerical simulations to investigate driving behaviour in a connected  
10 environment. However, neither NGSIM data nor numerical simulations have the realism of  
11 connected environment, and the impact of connected environment on human factors is unlikely  
12 to be represented or approximated by such data. Thus, the data collected from the advanced  
13 driving simulator in this study can be a valuable data source for evaluating and driving  
14 behaviour under a connected environment. Such (simulator) data has been used previously to  
15 record the car-following behaviour of distracted drivers (Saifuzzaman et al., 2015).  
16 Furthermore, the model developed using the driving simulator data has been used to  
17 successfully extract traffic characteristics (e.g., hysteresis) that are observed in NGSIM data  
18 (Saifuzzaman et al., 2017).

19 The current simulator system is deterministic in nature, and all the information are  
20 programmed. In our study, we intentionally controlled the complexity of the connected  
21 environment for the purpose of ensuring that the workload of a participant is reasonable, the  
22 collected data are reliable, and also the simulated connected environment is consistent with the  
23 state-of-the-practice in the automobile industries on how major car manufacturers have  
24 designed their driving aids (e.g., Adell et al. (2011); Saffarian et al. (2013)). The connected  
25 environment has the potential to provide more dynamic information. However, to ensure  
26 connected environment's safety, security, and public acceptance (and user friendliness), it is  
27 very unlikely the connected environment in the real life would adopt any complicated  
28 information dissemination strategy, especially for safety-critical events like lane-changing.

29 Finally, in the advanced driving simulator experiment, we hired a professional  
30 programmer to carefully program FVs' movements by considering car-following, safety rule,  
31 and SV's movement. FV's actions were triggered corresponding to the action of SV by tracking  
32 the steering wheel angle of SV. In our experiment design, FVs were programmed to maintain  
33 the same speed as SV's to ensure that all the participants face similar vehicular interactions at  
34 the same simulation point. Due to driver heterogeneity, it is difficult to define a representative  
35 speed for FVs in the simulator. As such and to realistically mimic the field conditions, FVs  
36 were scripted to accelerate, decelerate or remain unaffected by the mandatory lane-changing's  
37 action of SV; these actions mimic how drivers react to mandatory lane-changing attempt in the  
38 real data or NGSIM. Such information of experiment design was not used during the data  
39 processing and game theory model evaluation to avoid favourable but biased evaluation results  
40 of our model. In contrast, we employ the segmentation algorithm to extract the strategies from  
41 the simulator data rather than using the designed interactions.

## 42 **7.2 Conclusion**

43 As one of the first studies, this study has developed comprehensive mandatory lane-changing  
44 models (i.e., the AZHW models) for modelling drivers' merging behaviour (a typical type of  
45 mandatory lane-changing) both for the traditional environment and the connected environment.  
46 The connected environment provides information about surrounding traffic conditions that can  
47 be useful for efficient mandatory lane-changing decision-making, and in assisting drivers to

1 avoid hazards caused by inaccurate mandatory lane-changing decisions. However, the  
2 mandatory lane-changing decision modelling in the connected environment is still in its early  
3 stages. Thus, by focusing on merging behaviour, this paper develops comprehensive mandatory  
4 lane-changing decision models for the traditional environment and for the connected  
5 environment. The developed models show a high accuracy in replicating observed mandatory  
6 lane-changing behaviour and outperforms the existing models.

7 The study also compared the developed LCD\_TE and LCD\_CE models with the Liu's  
8 model (Liu et al., 2007) and the Talebpour's model (Talebpour et al., 2015). Using the  
9 confusion matrix, the comparison analyses indicate that our models (the AZHW models) have  
10 consistently performed better than the Liu and the Talebpour models. It has also more  
11 accurately predicted the merging occurrence time and location. This implies that it is more  
12 consistent with the observed merging behaviour, and more suitable for integration into a  
13 microscopic simulation package. Furthermore, the two-strategy AZHW model was compared  
14 with the three-strategy AZHW model to justify the inclusion of the 'doing nothing strategy'.  
15 This result was consistent with the empirical evidence from the field observations.

16 Note that the driving behaviour in the real world can be different from that observed in  
17 the simulated environment. Thus, in this study, the LCD\_TE model using NGSIM is not  
18 compared with the LCD\_CE model using the advanced driving simulator data. Instead, to  
19 capture the relative behavioural differences between traditional and connected environment,  
20 the baseline and connected environment scenario data collected from the advanced driving  
21 simulator experiment are utilised to compare the performance of the LCD\_TE and LCD\_CE  
22 models. This is because both the driving conditions and the environment are the same in both  
23 scenarios.

24 This study focusses on modelling mandatory lane-changing behaviour in the connected  
25 environment using game theory approach, and solves the game by using the Nash equilibrium  
26 concept; however, it would be interesting to analyse the impact of different equilibria concepts  
27 on the game outcome, as suggested by Dixit and Denant-Boemont (2014). A similar modelling  
28 framework could be developed for discretionary lane-changing decision-making in a connected  
29 environment. Furthermore, Sharma et al. (2018) highlight the importance of human factors in  
30 microscopic driving behaviour. With the emergence of connectivity, the urgency to incorporate  
31 human factors into LCD models increases; such enhancement/extension of the models will  
32 make them more realistic.

### 33 **Acknowledgments**

34 The authors would like to acknowledge Mr. Andrew Haines for programming the simulator  
35 experiment, and the help of Mr. Anshuman Sharma and Dr. Mohammad Saifuzzaman in the  
36 experiment design and data collection. We would also like to thank Mr. Nikhil and Ms.  
37 Chaitrali for their assistance in implementing the calibration framework. This research was  
38 partially funded by the Australian Research Council (ARC) through Dr. Zuduo Zheng's  
39 Discovery Early Career Researcher Award (DECRA; DE160100449).

### 40 **Appendix A. Calculation of the payoffs for FV**

41 To calculate the projected accelerations, basic equations of motion are utilized to predict future  
42 states. Initial states at the decision time are:  $v_{SV}$  = Initial speed (m/s) of SV;  $v_{FV}$  = Initial speed  
43 (m/s) of FV;  $a_{SV}$  = Initial acceleration (m/s<sup>2</sup>) of SV;  $a_{FV}$  = initial acceleration (m/s<sup>2</sup>) of FV;  
44  $RD$  = remaining distance (m) on the acceleration lane for FV;  $X$  = initial gap (distance in m)  
45 between SV and FV.

1 The definition of projected time is adopted from Liu et al. (2007) i.e., “the time at which  
 2 *FV anticipates SV to enter in through traffic*”. The projected/final states from FV’s perspective  
 3 are:  $v'_{SV}$  = projected speed (m/s) of SV;  $v'_{FV}$  = projected speed (m/s) of FV;  $t'_{SV}$  = the time  
 4 duration (s) that FV anticipates SV would need to complete the remaining distance (RD) on  
 5 the acceleration lane;  $X'$  = gap distance (m) between FV and SV when SV joins freeway.

$$6 \quad v'_{SV} = \sqrt{(v_{SV})^2 + 2a_{SV}RD} ; t'_{SV} = \frac{v'_{SV} - v_{SV}}{a_{SV}} ; v'_{FV} = v_{FV} + a_{FV}t'_{SV}$$

7 Calculation of gap (distance between the front bumper of the leader to the front  
 8 bumper of the follower) between SV and FV is based on the difference of speed and RD.  
 9  $L_n$  indicates the length of vehicle (m) under consideration.

$$10 \quad X' = RD + X - L_n - \frac{(v'_{FV})^2 - (v_{FV})^2}{2a_{FV}} ; Acc_{D-M} = \frac{v_{SV} - v_{FV}}{t'_{SV}} ; Acc_{FV}^{LV TL} = \frac{v_{LV TL} - v_{FV}}{t'_{SV}} ;$$

$$11 \quad Acc_{FV}^{FV TL} = \frac{v_{FV} - v_{FV TL}}{t'_{SV}} , v_{LV TL} \text{ is the speed of LV in the target lane, } v_{FV TL} \text{ is speed of FV in}$$

$$12 \quad \text{the target lane; } \Delta V = v_{LV \text{ in current lane}} - v_{LV \text{ in target lane}}, \text{ which is change in speed; } G =$$

$$13 \quad \text{Lead gap} + \text{Lag gap}, \text{ which is the available gap.}$$

## 15 Appendix B. Calculation of the payoffs for SV

$$16 \quad Acc_{M-A} = \frac{2(RD - v_{SV}t_{M-A})}{t_{M-A}^2} ; t_{M-A} = \frac{\sqrt{v_{SV}^2 + 2Acc_{max}RD} - v_{SV}}{Acc_{max}}$$

17 to wait on the acceleration lane before merging;  $Acc_{M-D} = \frac{2(RD - v_{SV}t'_{M-D})}{t_{M-D}^2} ; t_{M-D} =$

$$18 \quad \frac{\sqrt{v_{SV}^2 + 2Acc_{comfort}RD} - v_{SV}}{Acc_{comfort}}$$

19 , which is waiting time that SV has to wait on the acceleration lane before merging and comprehend the signal of merging from FV.

$$20 \quad Acc_{M-LC} = \frac{2(RD - v_{SV}t'_{SV})}{t_{SV}^2} ; Acc_{W-A} = \frac{v'_{SV} - v_{SV}}{t_{W-A}} ; t_{W-A} = \frac{(v_{SV} - v_{FV}) + \sqrt{(v_{SV} - v_{FV})^2 + 2a_{FV}X}}{a_{FV}}$$

21 is the waiting time SV has to wait till FV overpasses it;  $Acc_{W-D} = \frac{2(RD - v_{SV}(t'_{SV} + t_{W-D}))}{t_{SV}^2} ;$

$$22 \quad t_{W-D} = \frac{\sqrt{v_{SV}^2 + 2Acc_{comfort}(RD - v_{SV}t'_{SV})} - v_{SV}}{Acc_{comfort}}$$

23 , which is the waiting time SV has to wait to recognize the invitation of FV;  $Acc_{W-DN} = \frac{v'_{SV} - v_{SV}}{t_{W-DN}} ; t_{W-DN} = \frac{(v_{SV} - v_{FV}) + \sqrt{(v_{SV} - v_{FV})^2 + 2a_{FV}X}}{a_{FV}}$ ,

24 which is the waiting time for SV till FV overpasses it;  $Acc_{W-LC} = \frac{v'_{SV} - v_{SV}}{t'_{SV}}$

## 25 Appendix C. The payoffs for the Talebpour’s model

$$26 \quad Acc_{Target}^C = \frac{v'_{SV} - v'_{FV TL}}{t'_{SV}} ; Acc_{Lead}^C = \frac{v'_{LV TL} - v'_{SV}}{t'_{SV}} ; \Delta V = v_{LV \text{ in current lane}} - v_{LV \text{ in target lane}}$$

## 27 References

- 28 Adell, E., Várhelyi, A. & Dalla Fontana, M. 2011. The effects of a driver assistance system for  
 29 safe speed and safe distance—a real-life field study. *Transportation research part C: emerging technologies*, 19, 145-155.  
 30 Ahmed, K., Ben-Akiva, M., Koutsopoulos, H. & Mishalani, R. 1996. Models of freeway lane  
 31 changing and gap acceptance behavior. *Transportation and traffic theory*, 13, 501-515.  
 32

- 1 Ahn, S. & Cassidy, M. J. Freeway traffic oscillations and vehicle lane-change maneuvers.  
2 Proceedings of the 17th International Symposium on Transportation and Traffic  
3 Theory, Amsterdam, pp. 691–710. , 2007.
- 4 Ali, Y., Zheng, Z. & Haque, M. M. 2018. Connectivity’s impact on mandatory lane-changing  
5 behaviour: Evidences from a driving simulator study. *Transportation Research Part C:  
6 Emerging Technologies*, 93, 292-309.
- 7 Arbis, D. & Dixit, V. V. 2019. Game theoretic model for lane changing: Incorporating conflict  
8 risks. *Accident Analysis & Prevention*, 125, 158-164.
- 9 Arbis, D., Dixit, V. V. & Rashidi, T. H. 2016. Impact of risk attitudes and perception on game  
10 theoretic driving interactions and safety. *Accident Analysis & Prevention*, 94, 135-142.
- 11 Austroads 1993. Rural road design.” Guide to the geometric design of rural roads.  
12 *AUSTROADS Publication AP-1/89, Sydney, Australia.*
- 13 Beck, D., Lee, M. & Park, W. 2017. A comparative evaluation of in-vehicle side view displays  
14 layouts in critical lane changing situation. *Ergonomics*, 60, 1682-1691.
- 15 Cassidy, M. J. & Rudjanakanoknad, J. 2005. Increasing the capacity of an isolated merge by  
16 metering its on-ramp. *Transportation Research Part B: Methodological*, 39, 896-913.
- 17 Choudhury, C., Akiva, M. B., Toledo, T., Rao, A. & Lee, G. 2006. Cooperative lane changing  
18 and forced merging model: NGSIM final report. *Federal Highway Administration.*
- 19 D'aspremont, C. & Jacquemin, A. 1988. Cooperative and noncooperative R & D in duopoly  
20 with spillovers. *The American Economic Review*, 78, 1133-1137.
- 21 Dickhaut, J. & Kaplan, T. 1993. A program for finding Nash equilibria. *Economic and  
22 Financial Modeling with Mathematica®*. Springer.
- 23 Dixit, V. V. & Denant-Boemont, L. 2014. Is equilibrium in transport pure Nash, mixed or  
24 Stochastic? *Transportation Research Part C: Emerging Technologies*, 48, 301-310.
- 25 Dockner, E. J. & Van Long, N. 1993. International pollution control: cooperative versus  
26 noncooperative strategies. *Journal of Environmental Economics and Management*, 25,  
27 13-29.
- 28 Doshi, A. & Trivedi, M. A comparative exploration of eye gaze and head motion cues for lane  
29 change intent prediction. 2008 IEEE Intelligent Vehicles Symposium, 2008. IEEE, 49-  
30 54.
- 31 Doshi, A. & Trivedi, M. M. 2009. On the roles of eye gaze and head dynamics in predicting  
32 driver's intent to change lanes. *IEEE Transactions on Intelligent Transportation  
33 Systems*, 10, 453-462.
- 34 Fhwa. 2007. *Research Data Exchange, Interstate 80 Freeway Dataset* [Online]. Available:  
35 <https://www.its-rde.net/index.php/rddataenvironment/10023> [Accessed 07-02-2017].
- 36 Gipps, P. G. 1986. A model for the structure of lane-changing decisions. *Transportation  
37 Research Part B: Methodological*, 20, 403-414.
- 38 Hamdar, S. H. 2009. *Modeling driver behavior as a stochastic hazard-based risk-taking  
39 process*. PhD, Northwestern University.
- 40 Harsanyi, J. C. 1967. Games with incomplete information played by “Bayesian” players, i–iii:  
41 part i. the basic model. *Management science*, 14, 159-182.
- 42 Hidas, P. 2002. Modelling lane changing and merging in microscopic traffic simulation.  
43 *Transportation Research Part C: Emerging Technologies*, 10, 351-371.
- 44 Kang, K. & Rakha, H. A. 2017. Game Theoretical Approach to Model Decision Making for  
45 Merging Maneuvers at Freeway On-Ramps. *Transportation Research Record: Journal  
46 of the Transportation Research Board*, 19-28.
- 47 Keogh, E., Chu, S., Hart, D. & Pazzani, M. 2004. Segmenting time series: A survey and novel  
48 approach. *Data mining in time series databases*, 57, 1-22.
- 49 Keogh, E. J. & Pazzani, M. J. An Enhanced Representation of Time Series Which Allows Fast  
50 and Accurate Classification, Clustering and Relevance Feedback. *KDD*, 1998. 239-

- 1  
2 Kesting, A., Treiber, M. & Helbing, D. 2007. General lane-changing model MOBIL for car-  
3 following models. *Transportation Research Record: Journal of the Transportation*  
4 *Research Board*.
- 5 Kita, H. 1999. A merging–giveaway interaction model of cars in a merging section: a game  
6 theoretic analysis. *Transportation Research Part A: Policy and Practice*, 33, 305-312.
- 7 Kita, H., Tanimoto, K. & Fukuyama, K. A game theoretic analysis of merging-giveaway  
8 interaction: a joint estimation model. Proceedings of the 15th International Symposium  
9 on Transportation and Traffic Theory, 2002. 503-518.
- 10 Liu, H. X., Xin, W., Adam, Z. & Ban, J. 2007. A game theoretical approach for modelling  
11 merging and yielding behaviour at freeway on-ramp sections. *International Symposium*  
12 *on Transportation and Traffic Theory, Elsevier, London*, 197-211.
- 13 Maerivoet, S. & De Moor, B. 2005. Cellular automata models of road traffic. *Physics reports*,  
14 419, 1-64.
- 15 Mok, T. K., Liu, H., Ni, Y., Wu, F. F. & Hui, R. 2005. Tuning the fuzzy damping controller  
16 for UPFC through genetic algorithm with comparison to the gradient descent training.  
17 *International Journal of Electrical Power & Energy Systems*, 27, 275-283.
- 18 Montanino, M. & Punzo, V. 2015. Trajectory data reconstruction and simulation-based  
19 validation against macroscopic traffic patterns. *Transportation Research Part B:*  
20 *Methodological*, 80, 82-106.
- 21 Moridpour, S., Rose, G. & Sarvi, M. 2009. Modelling the heavy vehicle drivers' lane changing  
22 decision under heavy traffic conditions. *Road & Transport Research: A Journal of*  
23 *Australian and New Zealand Research and Practice*, 18, 49.
- 24 Nisan, N., Roughgarden, T., Tardos, E. & Vazirani, V. V. 2007. *Algorithmic game theory*,  
25 Cambridge University Press Cambridge.
- 26 Ozaki, H. 1993. Reaction and anticipation in car following behaviour. *Transportation and*  
27 *traffic theory*.
- 28 Rakha, H., Amer, A. & El-Shawarby, I. 2008. Modeling driver behavior within a signalized  
29 intersection approach decision-dilemma zone. *Transportation Research Record:*  
30 *Journal of the Transportation Research Board*, 16-25.
- 31 Saffarian, M., De Winter, J. C. & Happee, R. 2013. Enhancing driver car-following  
32 performance with a distance and acceleration display. *IEEE Transactions on Human-*  
33 *Machine Systems*, 43, 8-16.
- 34 Sagberg, F. & Bjørnskau, T. 2006. Hazard perception and driving experience among novice  
35 drivers. *Accident Analysis & Prevention*, 38, 407-414.
- 36 Saifuzzaman, M., Zheng, Z., Haque, M. M. & Washington, S. 2015. Revisiting the Task–  
37 Capability Interface model for incorporating human factors into car-following models.  
38 *Transportation Research Part B: Methodological*, 82, 1-19.
- 39 Saifuzzaman, M., Zheng, Z., Haque, M. M. & Washington, S. 2017. Understanding the  
40 mechanism of traffic hysteresis and traffic oscillations through the change in task  
41 difficulty level. *Transportation Research Part B: Methodological*, 105, 523-538.
- 42 Sharma, A., Ali, Y., Saifuzzaman, M., Zheng, Z. & Haque, M. M. Human Factors in Modelling  
43 Mixed Traffic of Traditional, Connected, and Automated Vehicles. 2018 Cham.  
44 Springer International Publishing, 262-273.
- 45 Spiess, H. 1990. A gradient approach for the OD matrix adjustment problem. *Centre de*  
46 *Recherche sur les Transports de Montréal*, 69. .
- 47 Sun, J., Zheng, Z. & Sun, J. 2018. Stability analysis methods and their applicability to car-  
48 following models in conventional and connected environments. *Transportation*  
49 *Research Part B: Methodological*, 109, 212-237.
- 50 Talebpour, A., Mahmassani, H. S. & Hamdar, S. H. 2015. Modeling lane-changing behavior

1           in a connected environment: A game theory approach. *Transportation Research*  
2           *Procedia*, 7, 420-440.

3   Thiemann, C., Treiber, M. & Kesting, A. 2008. Estimating Acceleration and Lane-Changing  
4           42 Dynamics Based on NGSIM Trajectory Data. *87 th Transportation Research Board*  
5           *Annual*, 43.

6   Toledo, T., Choudhury, C. & Ben-Akiva, M. 2005. Lane-changing model with explicit target  
7           lane choice. *Transportation Research Record: Journal of the Transportation Research*  
8           *Board*, 157-165.

9   Toledo, T. & Katz, R. 2009. State dependence in lane-changing models. *Transportation*  
10          *Research Record: Journal of the Transportation Research Board*, 81-88.

11   Toledo, T., Koutsopoulos, H. & Ben-Akiva, M. 2003. Modeling integrated lane-changing  
12          behavior. *Transportation Research Record: Journal of the Transportation Research*  
13          *Board*, 30-38.

14   Wang, M., Hoogendoorn, S. P., Daamen, W., Van Arem, B. & Happee, R. 2015. Game  
15          theoretic approach for predictive lane-changing and car-following control.  
16          *Transportation Research Part C: Emerging Technologies*, 58, 73-92.

17   Weng, J., Xue, S. & Yan, X. 2016. Modeling Vehicle Merging Behavior in Work Zone  
18          Merging Areas During the Merging Implementation Period. *IEEE Transactions on*  
19          *Intelligent Transportation Systems*, 17, 917-925.

20   Yang, Q. & Koutsopoulos, H. N. 1996. A microscopic traffic simulator for evaluation of  
21          dynamic traffic management systems. *Transportation Research Part C: Emerging*  
22          *Technologies*, 4, 113-129.

23   Zheng, Z. 2014. Recent developments and research needs in modeling lane changing.  
24          *Transportation research part B: Methodological*, 60, 16-32.

25   Zheng, Z., Ahn, S., Chen, D. & Laval, J. 2011. Applications of wavelet transform for analysis  
26          of freeway traffic: Bottlenecks, transient traffic, and traffic oscillations. *Transportation*  
27          *Research Part B: Methodological*, 45, 372-384.

28   Zheng, Z., Ahn, S., Chen, D. & Laval, J. 2013. The effects of lane-changing on the immediate  
29          follower: Anticipation, relaxation, and change in driver characteristics. *Transportation*  
30          *research part C: Rmerging Technologies*, 26, 367-379.

31